# CS 43: Computer Networks The Transport Layer & UDP

Kevin Webb Swarthmore College February 22, 2022

### Transport Layer


- Moving "down" a layer.
- Current perspective:
  - Application is the boss...
  - Usually executing within the OS kernel.
  - The network layer is ours to command!

### Network Layer (Context)

- What it does: finds paths through network
  - *Routing* from one end host to another
- What it doesn't:
  - Reliable transfer: "best effort delivery"
  - Guarantee paths
  - Arbitrate transfer rates
- For now, think of the network layer as giving us an "API" with one function: sendtohost(data, host). Promise: the data will go there... Usually.

### Transport services and protocols

- Provides *logical communication* between processes.
- Runs in end systems.
  - Sender: breaks application messages into *segments*, passes to network layer
  - Receiver: reassembles segments into messages, passes to app layer
  - Exports services to application that network layer does not provide

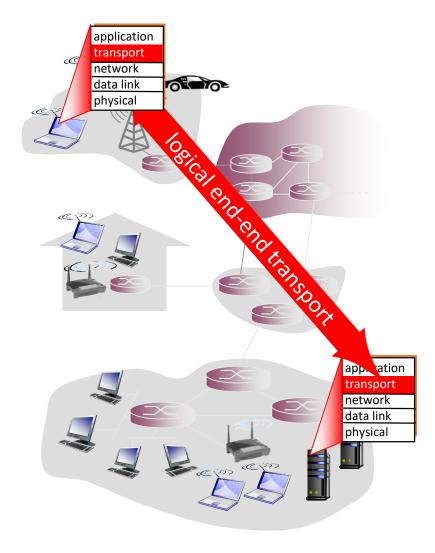

How many of these services might we provide at the transport layer? Which?

- Reliable transfers
- Error detection
- Error correction
- Bandwidth guarantees

- Latency guarantees
- Encryption
- Message ordering
- Link sharing fairness

A. 4 or fewer
B. 5
C. 6
D. 7
D. 7

How many of these services might we provide at the transport layer? Which?

- Reliable transfers (T)
- Error detection (U, T)
- Error correction (T)

C. 6

• Bandwidth guarantees

- Latency guarantees
- Encryption
- Message ordering (T)
- Link sharing fairness (T)

Critical question: Can it be done at the end host?

 A. 4 or fewer
 D. 7

 B. 5
 E. All 8

### TCP sounds great! UDP...meh. Why do we need it?

A. It has good performance characteristics.

- B. Sometimes all we need is error detection.
- C. We still need to distinguish between sockets.
- D. It basically just fills a gap in our layering model.

### Adding Features

- Nothing comes for free
- Data given by application
- Apply header
  - Keeps transport state
  - Attached by sender
  - Decoded by receiver


Payload Data




## (TCP) Overhead

- Establishing state (making a connection)
  - Recall HTTP 1.0 vs. HTTP 1.1
  - Extra communication round trip
- Delays due to loss / reordering.
- Playing fair might cost you!


### Recall: Addressing Sockets

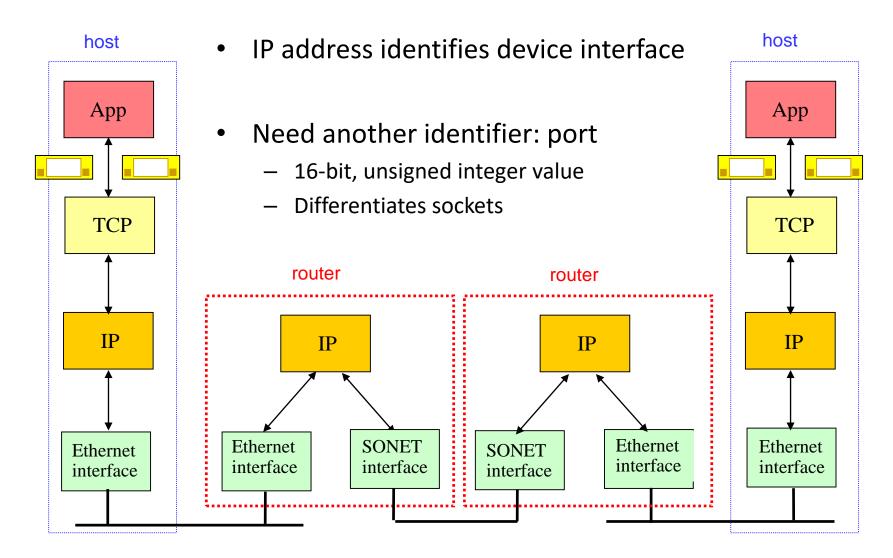

### Multiplexing

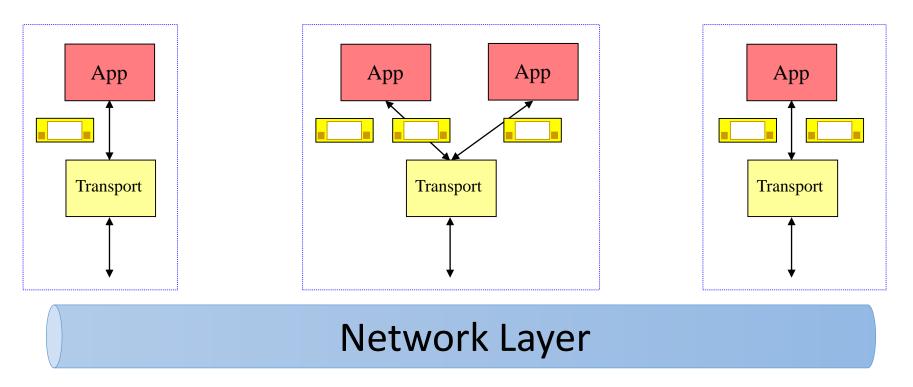


## Multiplexing

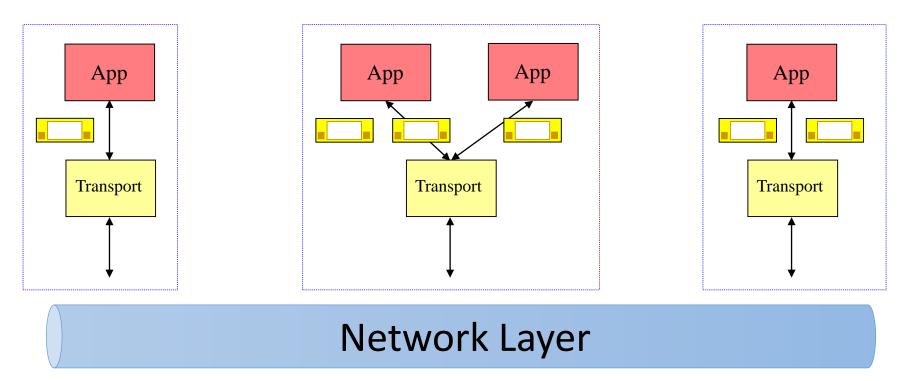


- The network is a shared resource.
  - It does NOT care about your applications, sockets, etc.
- Senders mark segments, in header, with identifier (port)


## Multiplexing

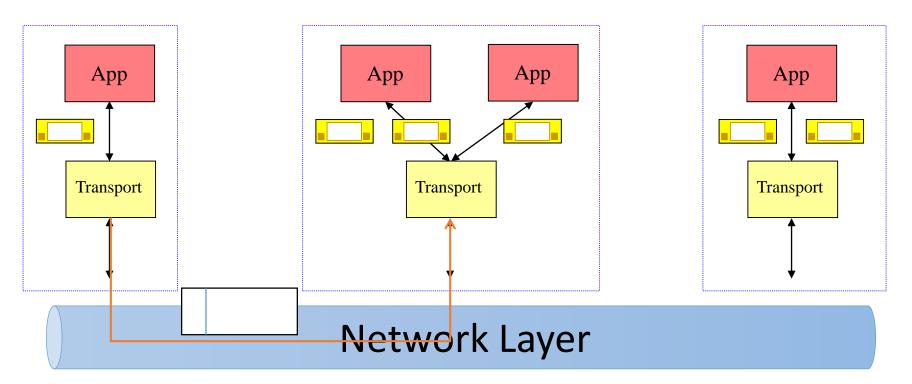


- The network is a shared resource.
  - It does NOT care about your applications, sockets, etc.
- Senders mark segments, in header, with identifier (port)

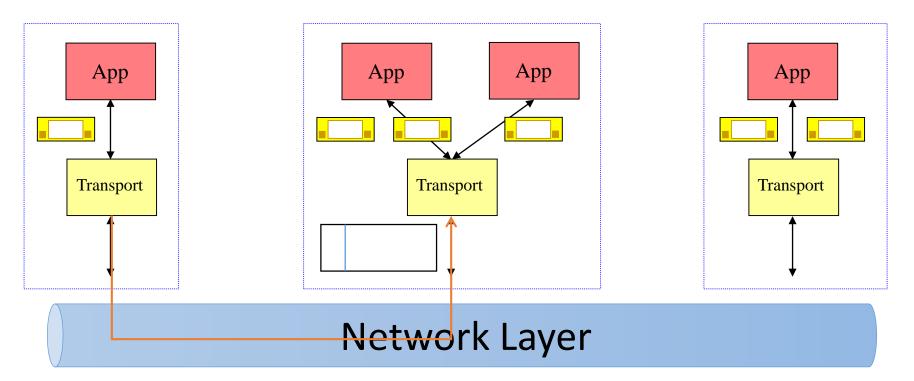


- The network is a shared resource.
  - It does NOT care about your applications, sockets, etc.
- Receivers check header, deliver data to correct socket.

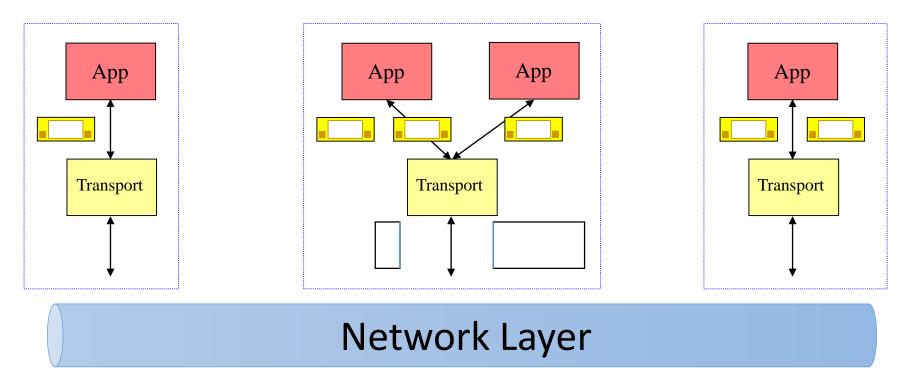

- The network is a shared resource.
  - It does NOT care about your applications, sockets, etc.
- Receivers check header, deliver data to correct socket.

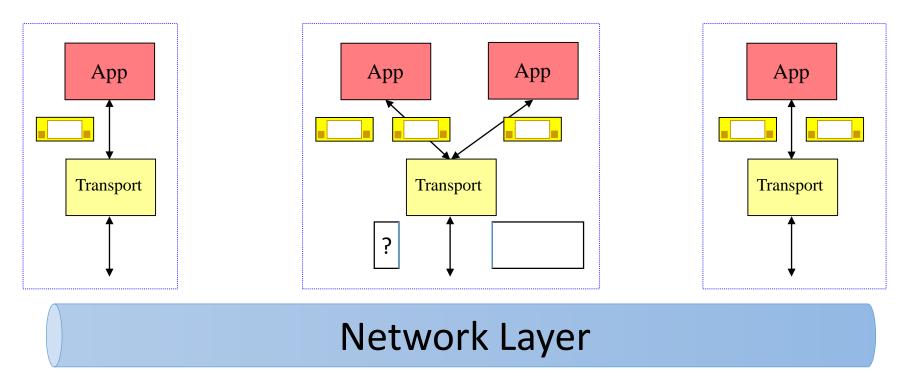

- The network is a shared resource.
  - It does NOT care about your applications, sockets, etc.
- Receivers check header, deliver data to correct socket.

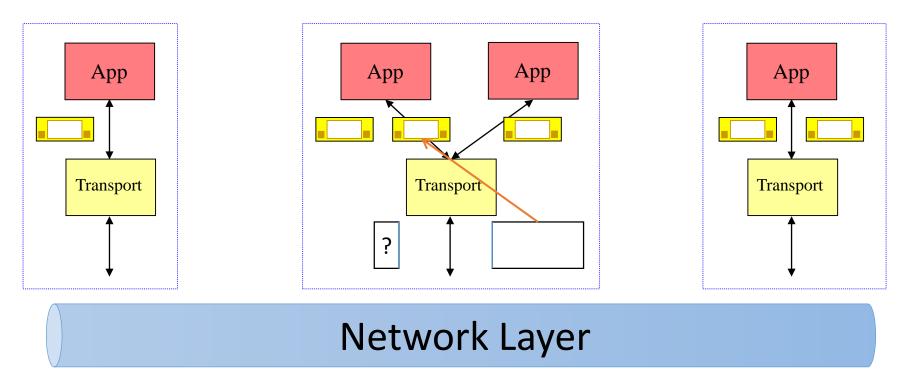

- The network is a shared resource.
  - It does NOT care about your applications, sockets, etc.
- Receivers check header, deliver data to correct socket.

#### UDP: User Datagram Protocol [RFC 768]

- "No frills," "Bare bones" Internet transport protocol
  - RFC 768 (1980)
  - Length of the document?
- "Best effort" service, UDP segments may be:
  - Lost
  - Delivered out of order
  - (Same as underlying network layer)
- Connectionless:
  - No initial state transferred between parties (no handshake)
  - Each UDP segment is handled independently

### UDP Segment

32 bits		
Source Port	Dest Port	
Length	Checksum	
Application Data (Payload)		

## TCP Segment

source port #	dest port #	
sequence number		
acknowledgement number		
head not len used UAPRSF	receive window	
checksum	Urg data pointer	
options (variable length)		
applica data (variabl	tion le length)	

32 bits

### UDP Segment

32 bits		
Source Port	Dest Port	
Length (incl header)	Checksum	
Application Data (Payload)		

### UDP Checksum

- Goal: Detect transmission errors (e.g. flipped bits)
  - Router memory errors
  - Driver bugs
  - Electromagnetic interference
- RFC: "Checksum is the 16-bit one's complement of the one's complement sum of a pseudo header of information from the IP header, the UDP header, and the data, padded with zero octets at the end (if necessary) to make a multiple of two octets."

### UDP Checksum


- Goal: Detect transmission errors (e.g. flipped bits)
  - Router memory errors
  - Driver bugs
  - Electromagnetic interference
- At the sender:
  - Treat the entire segment as 16-bit integer values
  - Add them all together (sum)
  - Put the 1's complement in the checksum header field

#### Recall CS31

- In bitwise compliment, all of the bits in a binary number are flipped.
- So 1111000011110000 -> 0000111100001111

#### Checksum Example

#### example: add two 16-bit integers

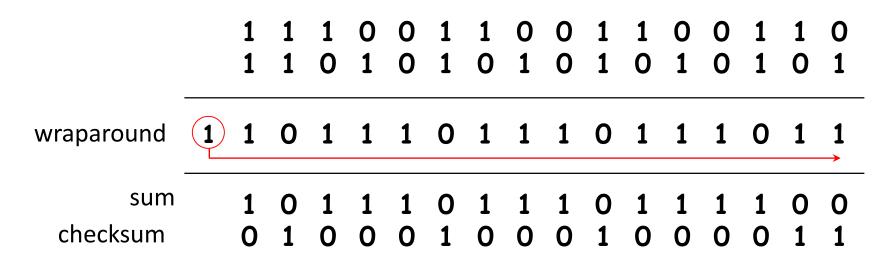

*Note:* when adding numbers, a carryout from the most significant bit needs to be added to the result

#### Receiver

- Add all the received data together as 16-bit integers
- Add that to the checksum
- If result is not 1111 1111 1111 1111, there are errors!

If our checksum addition yields all ones, are we guaranteed to be error-free?

A. Yes

B. No

### **UDP** Applications

- Latency sensitive
  - Quick request/response (DNS)
  - (Local) Network management (SNMP, TFTP)
  - Voice/video chat
- Error correction unnecessary (periodic msgs)
- Communicating with *lots* of others

### TCP: send() Blocking

• Recall: With TCP, send() blocks if buffer full.

### UDP: sendto() Blocking?

- Recall: With TCP, send() blocks if buffer full.
- Does UDP need to block? Should it?
- A. Yes, if buffers are full, it should.
- B. It doesn't need to, but it might be useful.
- C. No, it does not need to and shouldn't do so.

### Summary

- UDP: No frills transport protocol.
- Simple, 8-byte header with ports, length, checksum
- Checksum protects against most bit flips (detection, no correction)