CS 43: Computer Networks

12: Transport Layer

October 21, 2026



Announcements

- See Ed
- Office hours Friday 3:30pm-5pm, Sunday 1-2 (virtual)

Content distribution networks (CDNs)

- CDN: stores copies of content (e.g. MADMEN) at CDN nodes

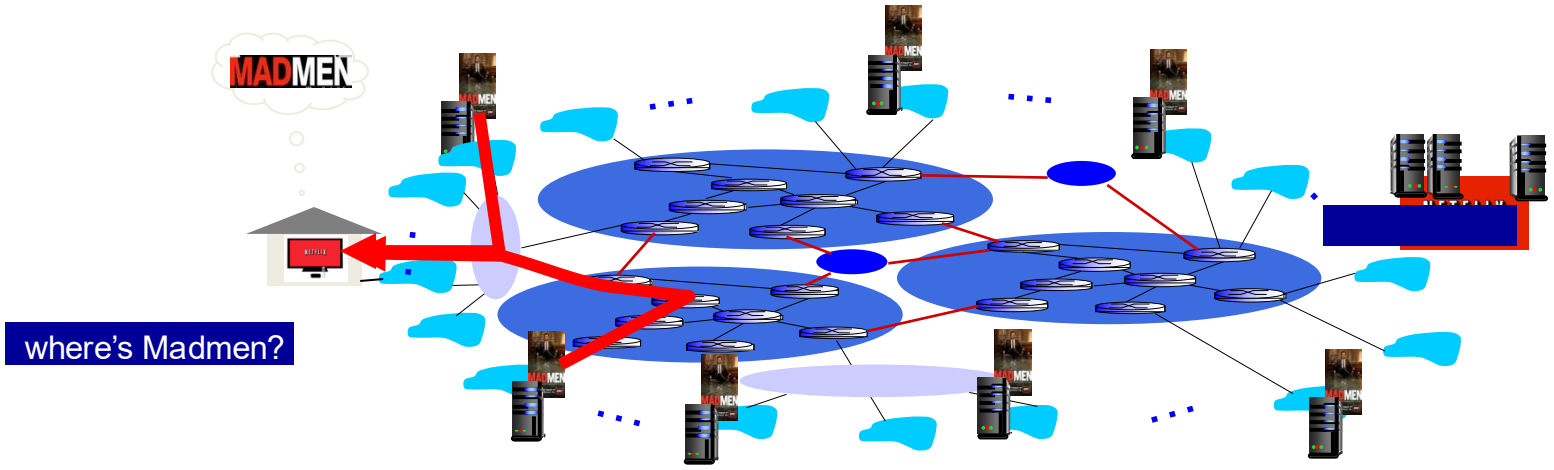

nearby CDN replicas

CDN caching

- Locality of reference:
  - Users tend to request the same object in succession
  - Some objects are popular: requested by many users

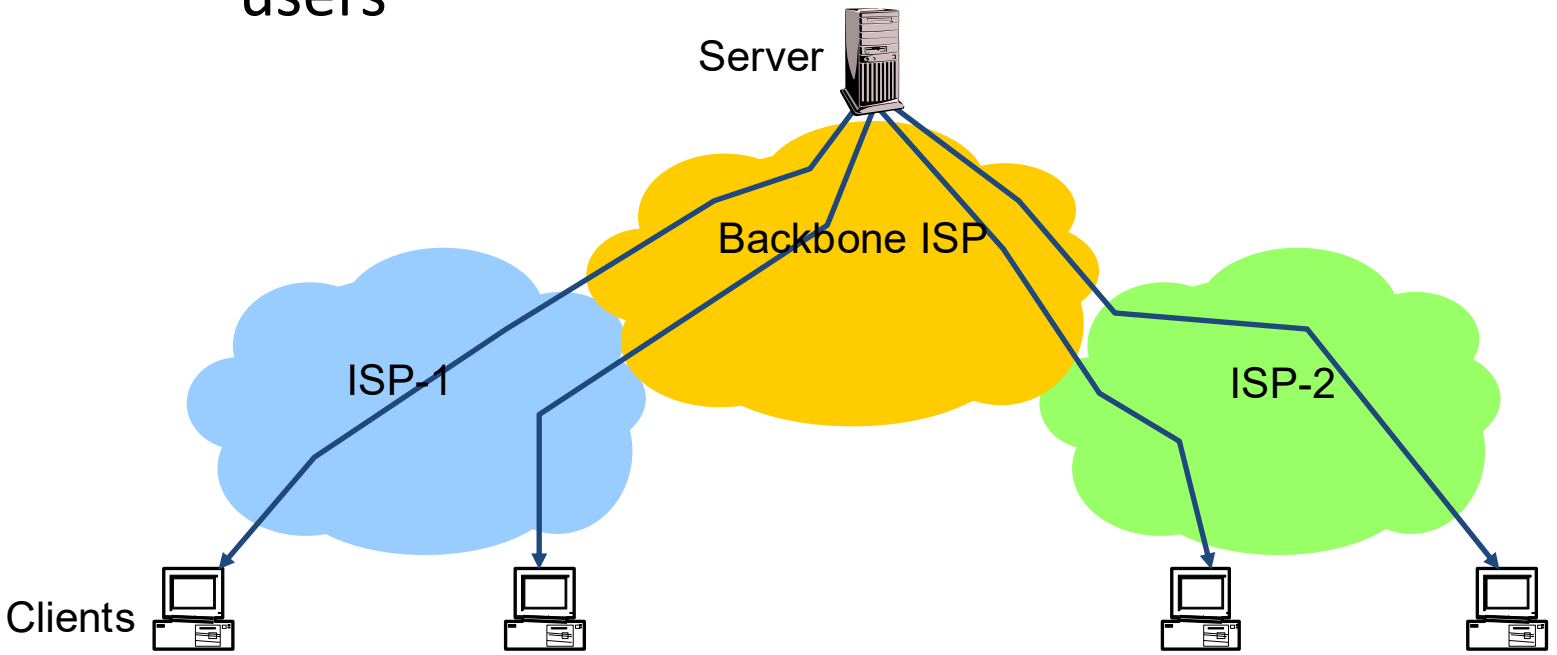

A Netflix cache box inside an ISP's network holds about 5% of the Netflix catalog. Roughly what fraction of that ISP's Netflix requests can it serve from the box?

A. About 5%
B. Well under 5%, since the box also has to hold manifests and metadata
C. Well over 5%, because a small number of titles account for most viewing
D. 100% because the box fetches anything missing before the viewer notices.
E. I don’t know

Where to cache content?

A. At the client
B. At the server (distributed server load)
C. At the Service Providers (ISPs)

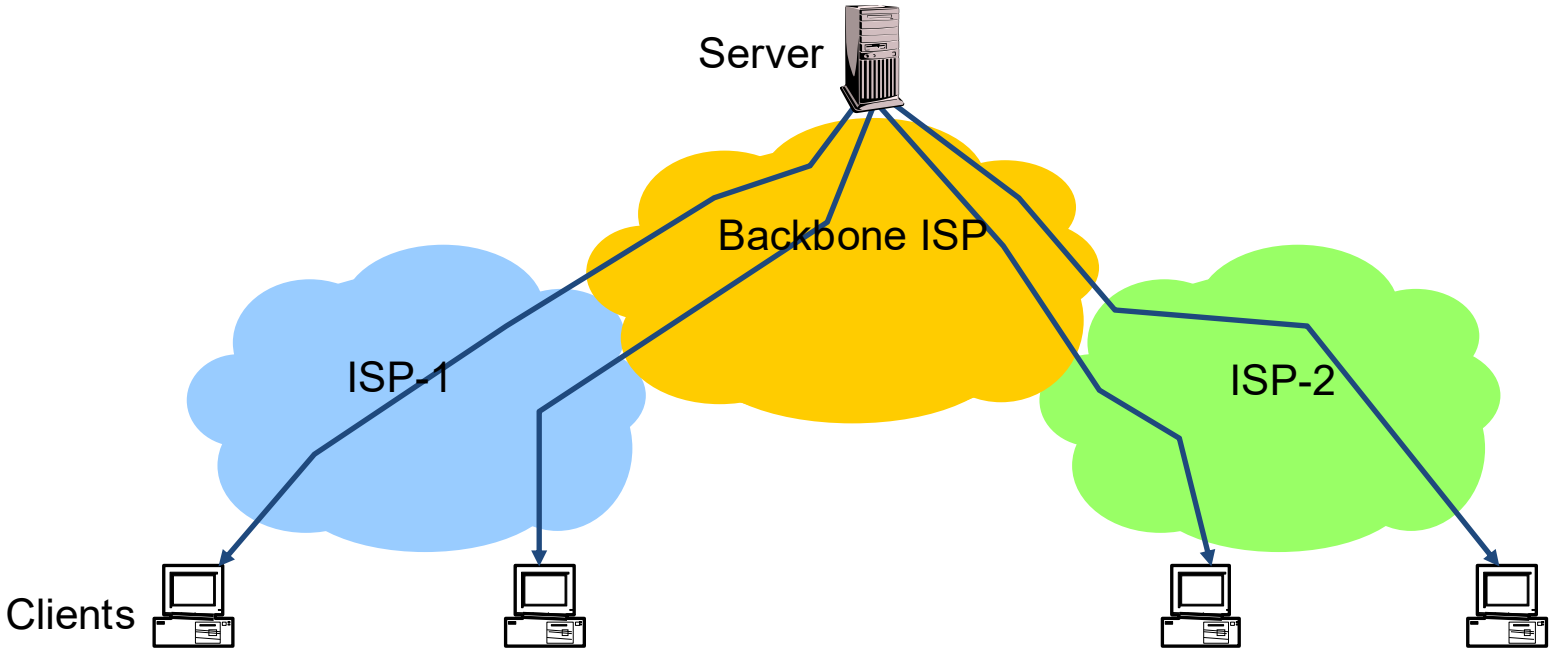

Where to cache content?

A. At the client (browser) – avoid extra network transfers
B. At the server (distributed server load) – reduce load
C. At the Service Providers (ISPs) – reduce external traffic

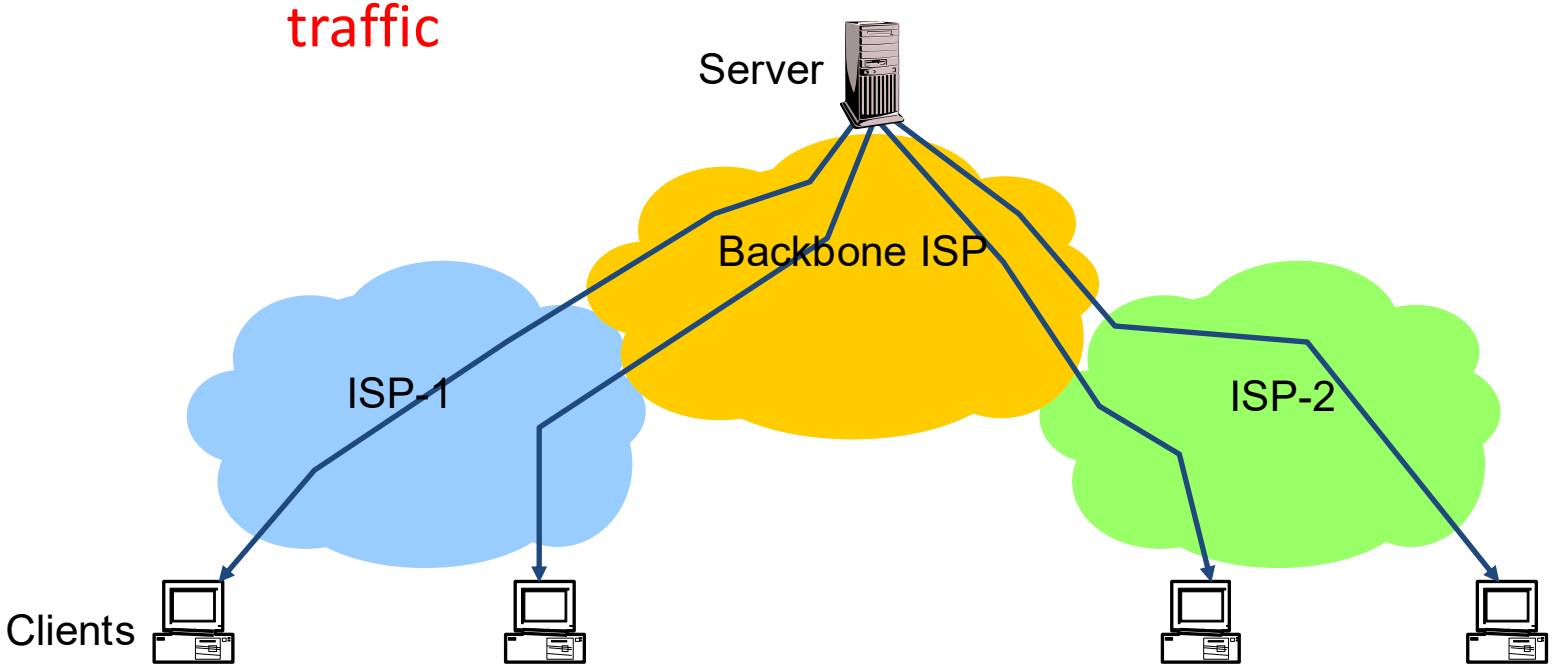

Key Components of a CDN

- Distributed servers
  - Usually located inside of other ISPs
  - Often located in IXPs
- High-speed network connecting them
- Clients (eyeballs)
  - Can be located anywhere in the world
  - They want fast web performance
- Glue
  - Something that binds clients to “nearby” replica servers

High-Performance Content Distribution

- Major challenges:
  - How do we direct the user to a nearby replica instead of the centralized source?
  - How do we determine which replica is the best to send them to?
  - Ensure that replicas are always available?

Challenge: Finding the CDN

- Three main options:
  - Application redirect (e.g., HTTP)
  - “Anycast” routing
  - DNS resolution (most popular in practice)

- Example: NBC News + Akamai
- See reference material at end of these slides

Let's use dig to see how Akamai uses DNS redirection…

When you looked up www.nbcnews.com, Akamai's DNS server chose which Akamai cluster to send you to. Your laptop asked the campus resolver, which did the lookup on your behalf. Whose IP address does Akamai's DNS server actually see when it makes that choice?

A. The laptop's
B. The campus DNS resolver's
C. NBC's web server's
D. The .com TLD server
E. I don't know

Which metric is most important when choosing a server? (CDN or otherwise)

A. RTT latency

B. Data transfer rate / throughput

C. Hardware ownership

D. Geographic location

E. Some other metic(s) (such as?)

This is the CDN operator's secret sauce!

Summary

- DASH: streaming despite dynamic conditions

- CDNs: locating “good” replica for media server
  - Challenges: which content to cache, and which server to direct clients to?

Application Layer

Does whatever an application does!

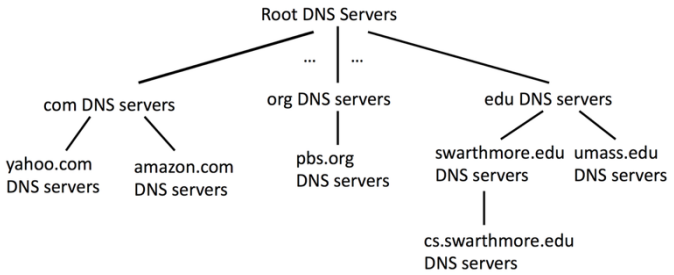

DNS



Chrome



Thunderbird



Skype

Application Layer

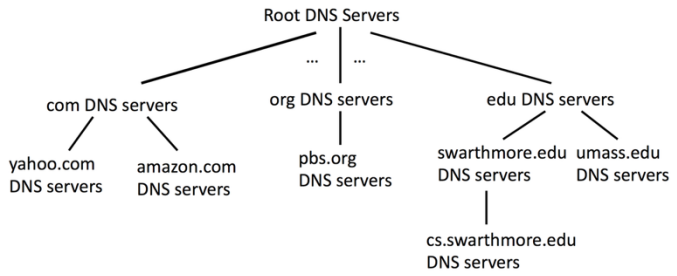

DNS



Chrome



Thunderbird



Skype

Client-server architecture

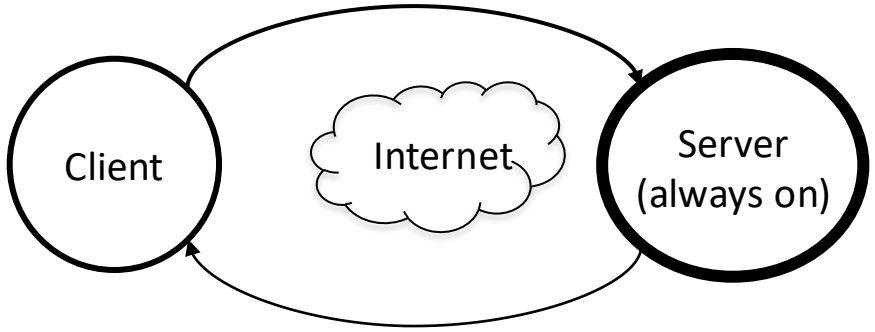

Peer-to-peer architecture

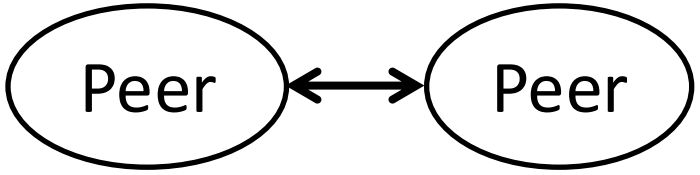

Application Layer

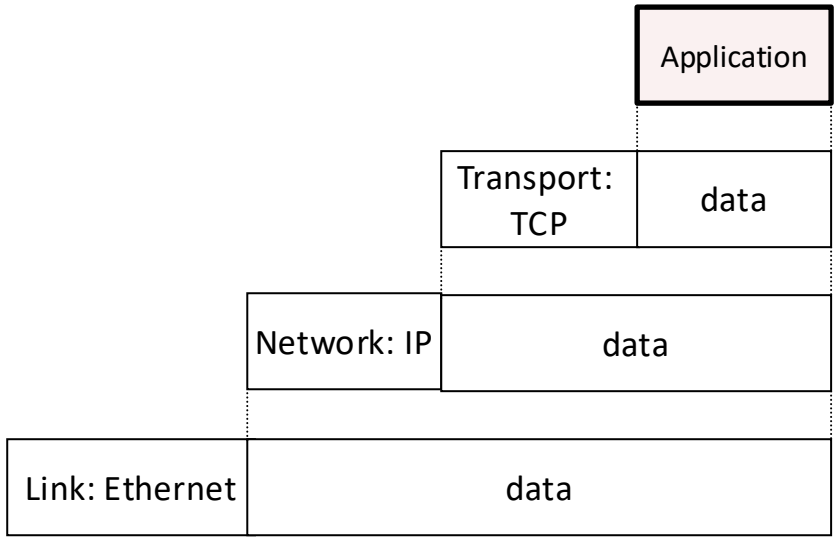

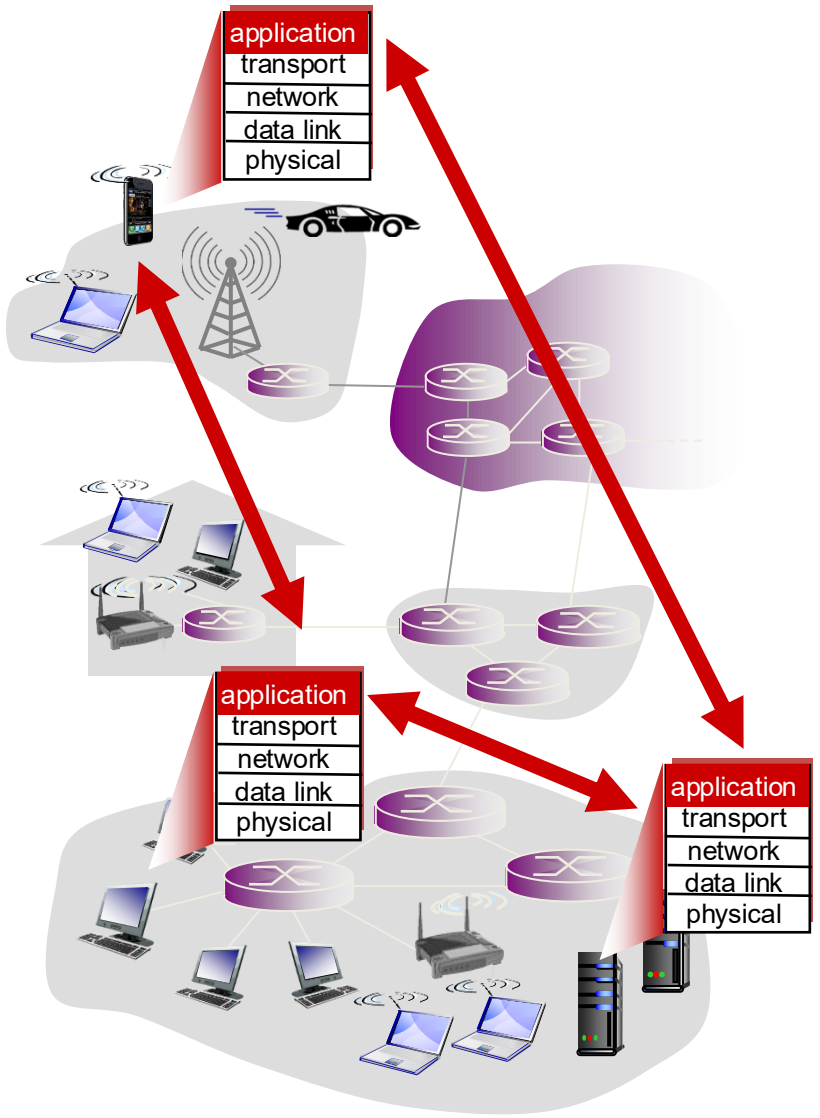

Encapsulation:

Higher layer within lower layer

Transport Layer!

Moving down a layer!

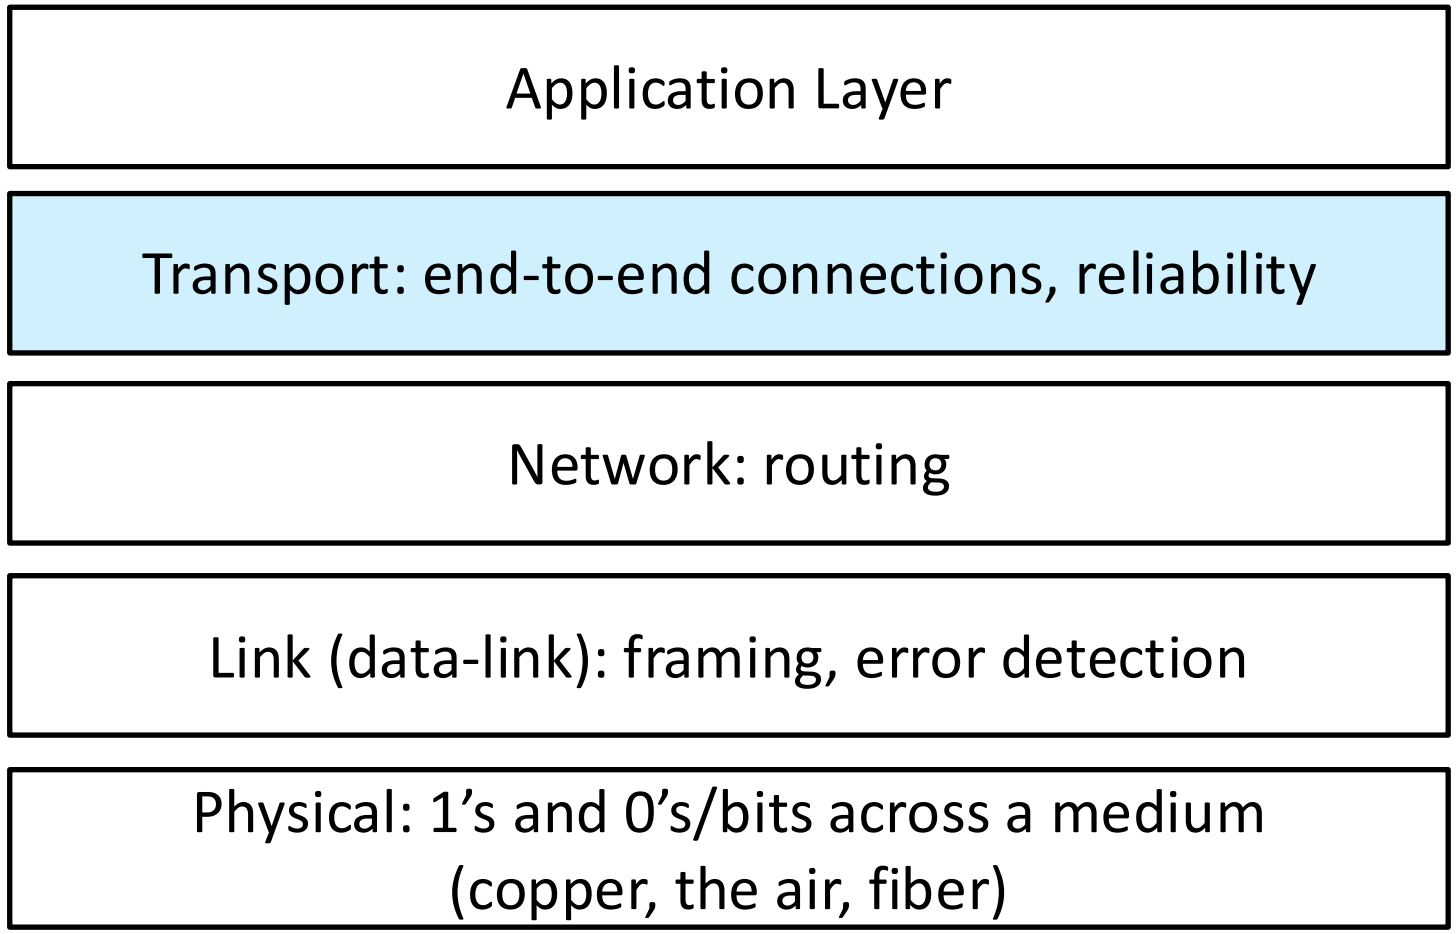

Message Encapsulation

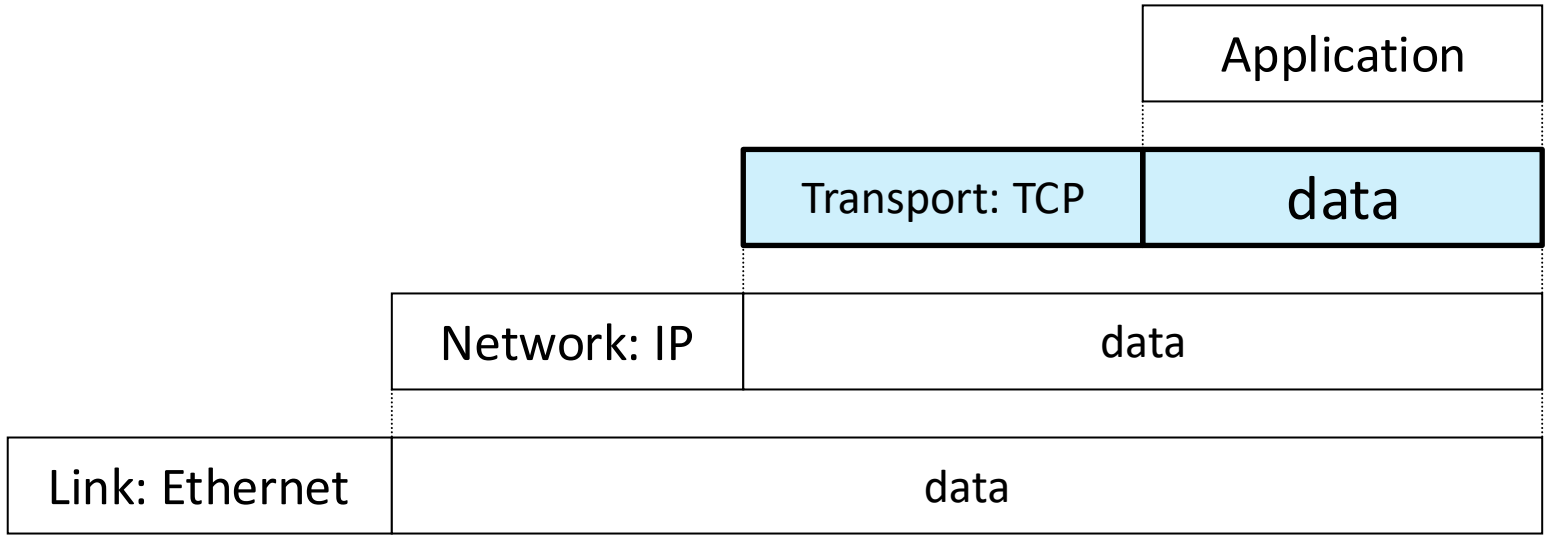

- Higher layer within lower layer
- Each layer has different concerns, provides abstract services to those above

Recall: Addressing and Encapsulation

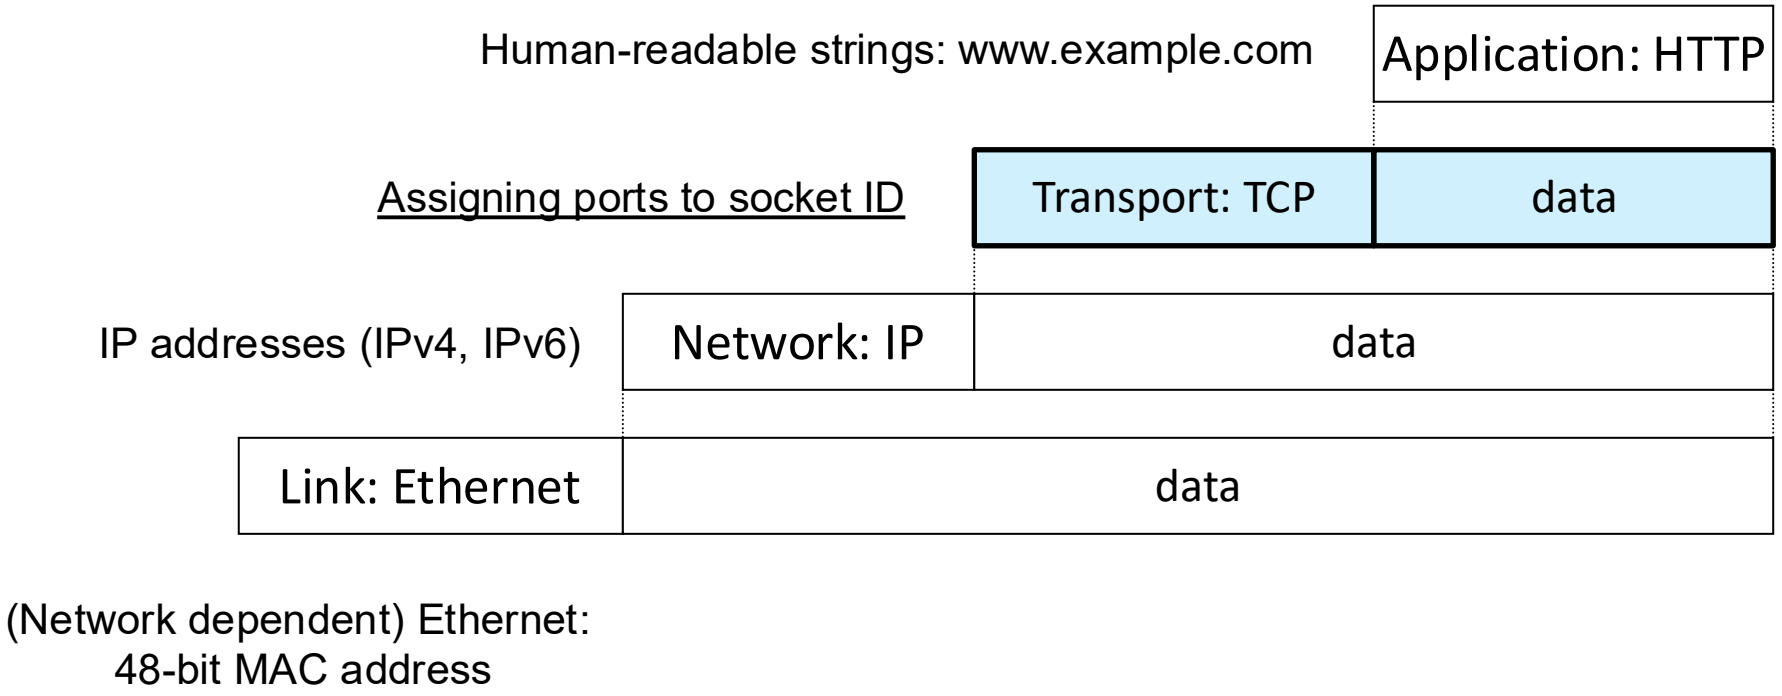

Transport Layer perspective

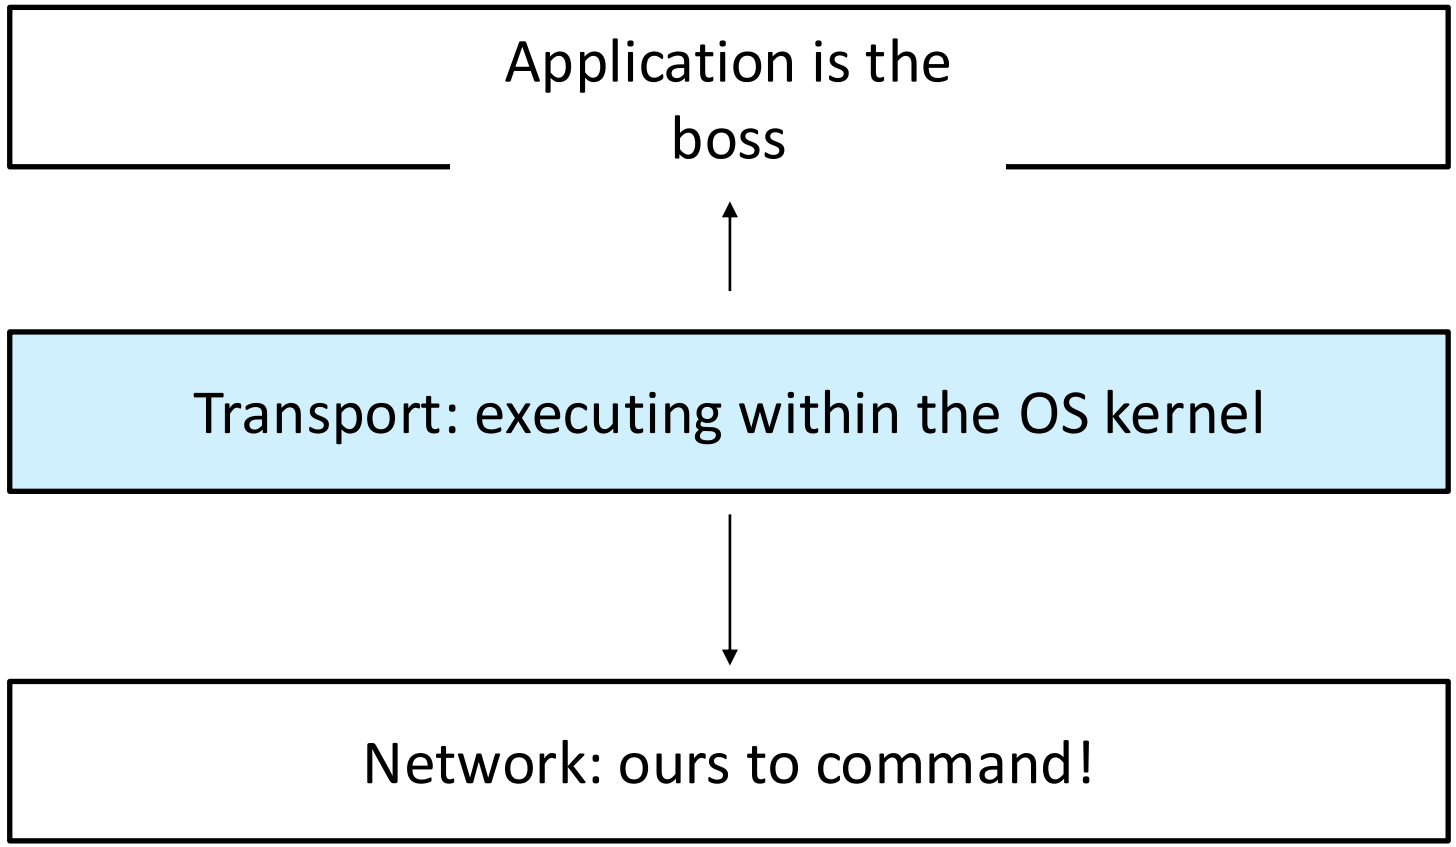

Transport Layer perspective

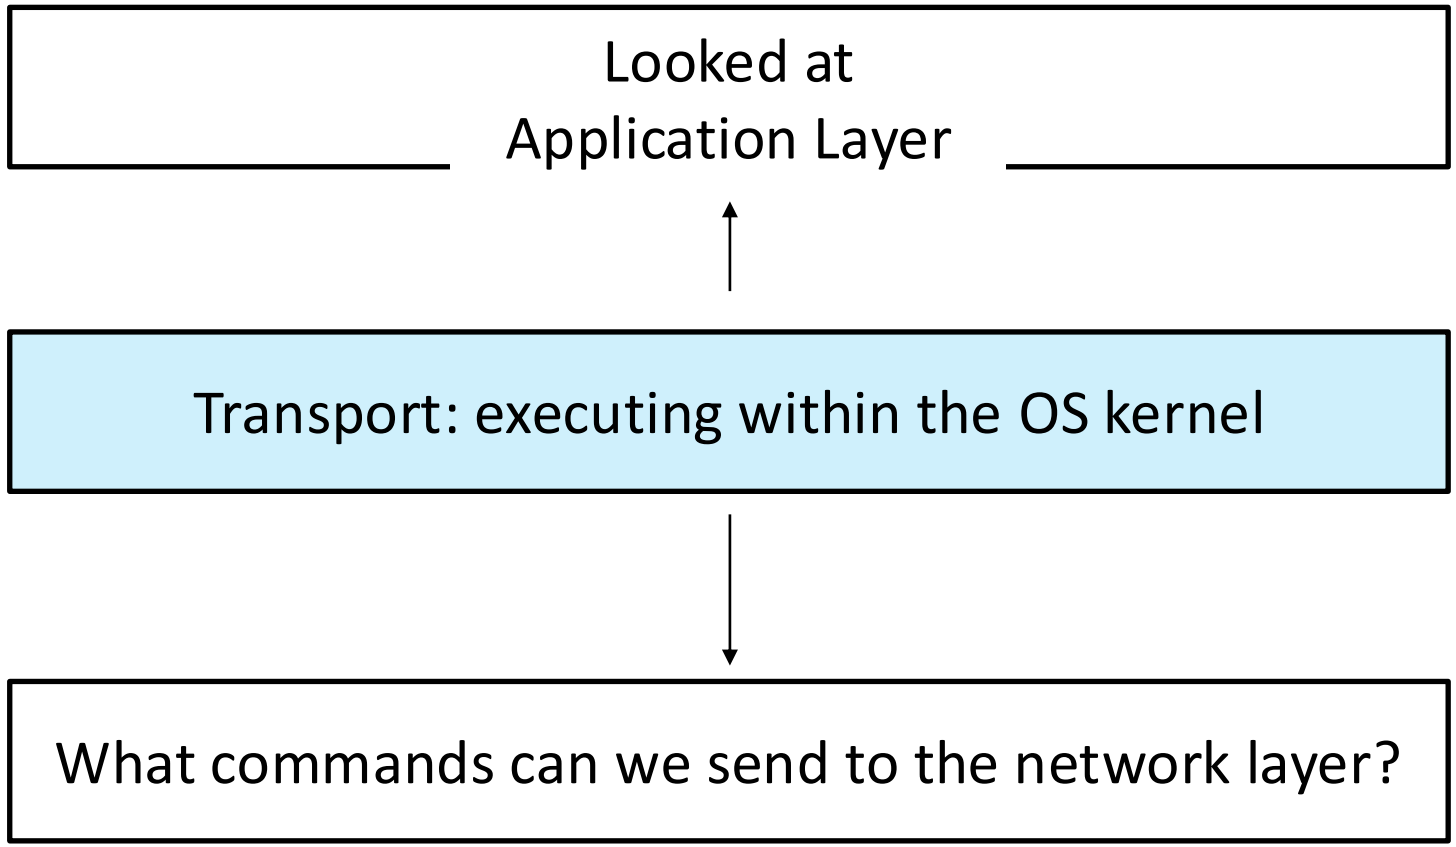

What services does the network layer provide to the transport layer?

A. Find paths through the network

B. Guaranteed delivery rates

C. Best-effort delivery

D. Reliable Data Transfer

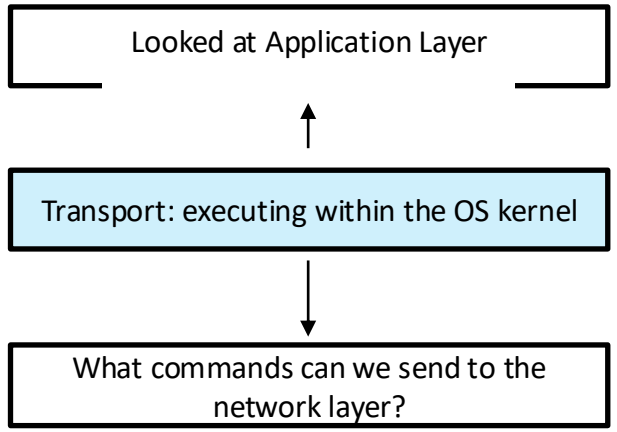



Network Layer API

send_to_host (data, host_IP) : logical communication between end-hosts

- ✔ Find paths through the network
- ✔ Best-effort delivery!
- ✘ reliable data transfer
- ✘ guaranteed delivery (or rate!)

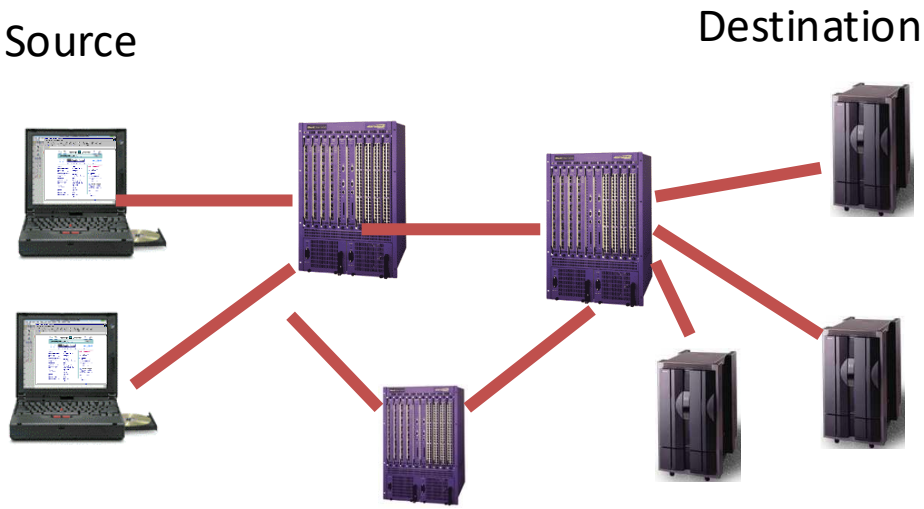

Transport Layer API

Provides logical communication between processes.

send_data_to_application (data, port, socket)

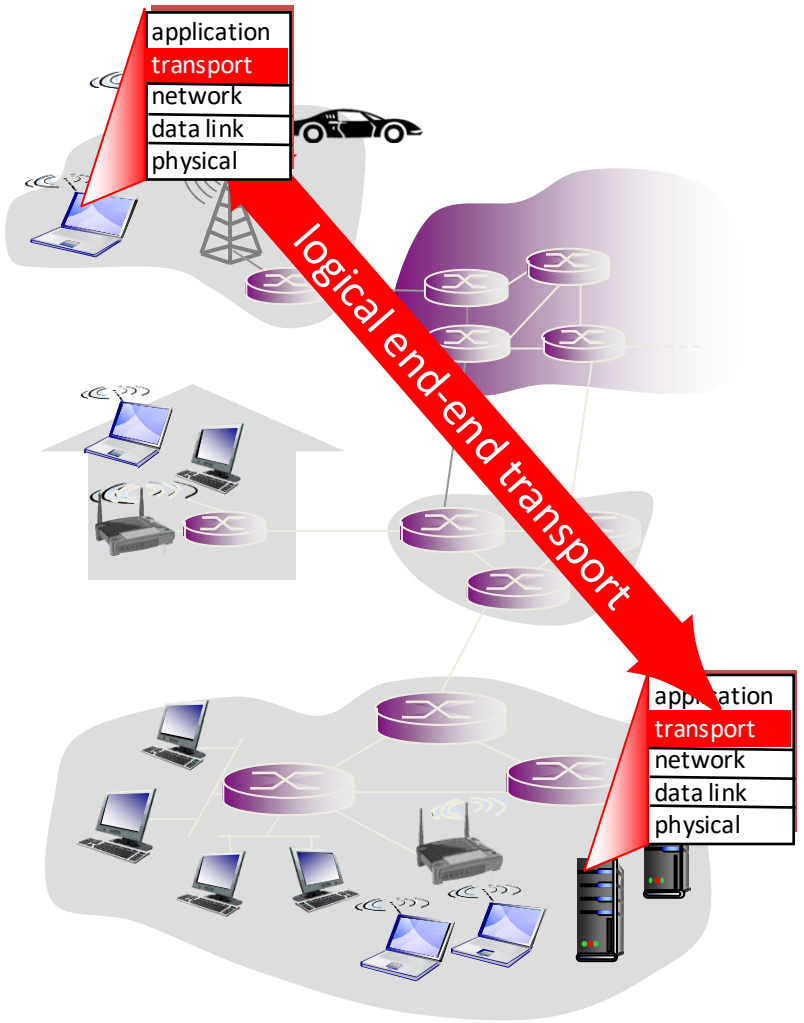

Transport Layer: Runs on end systems

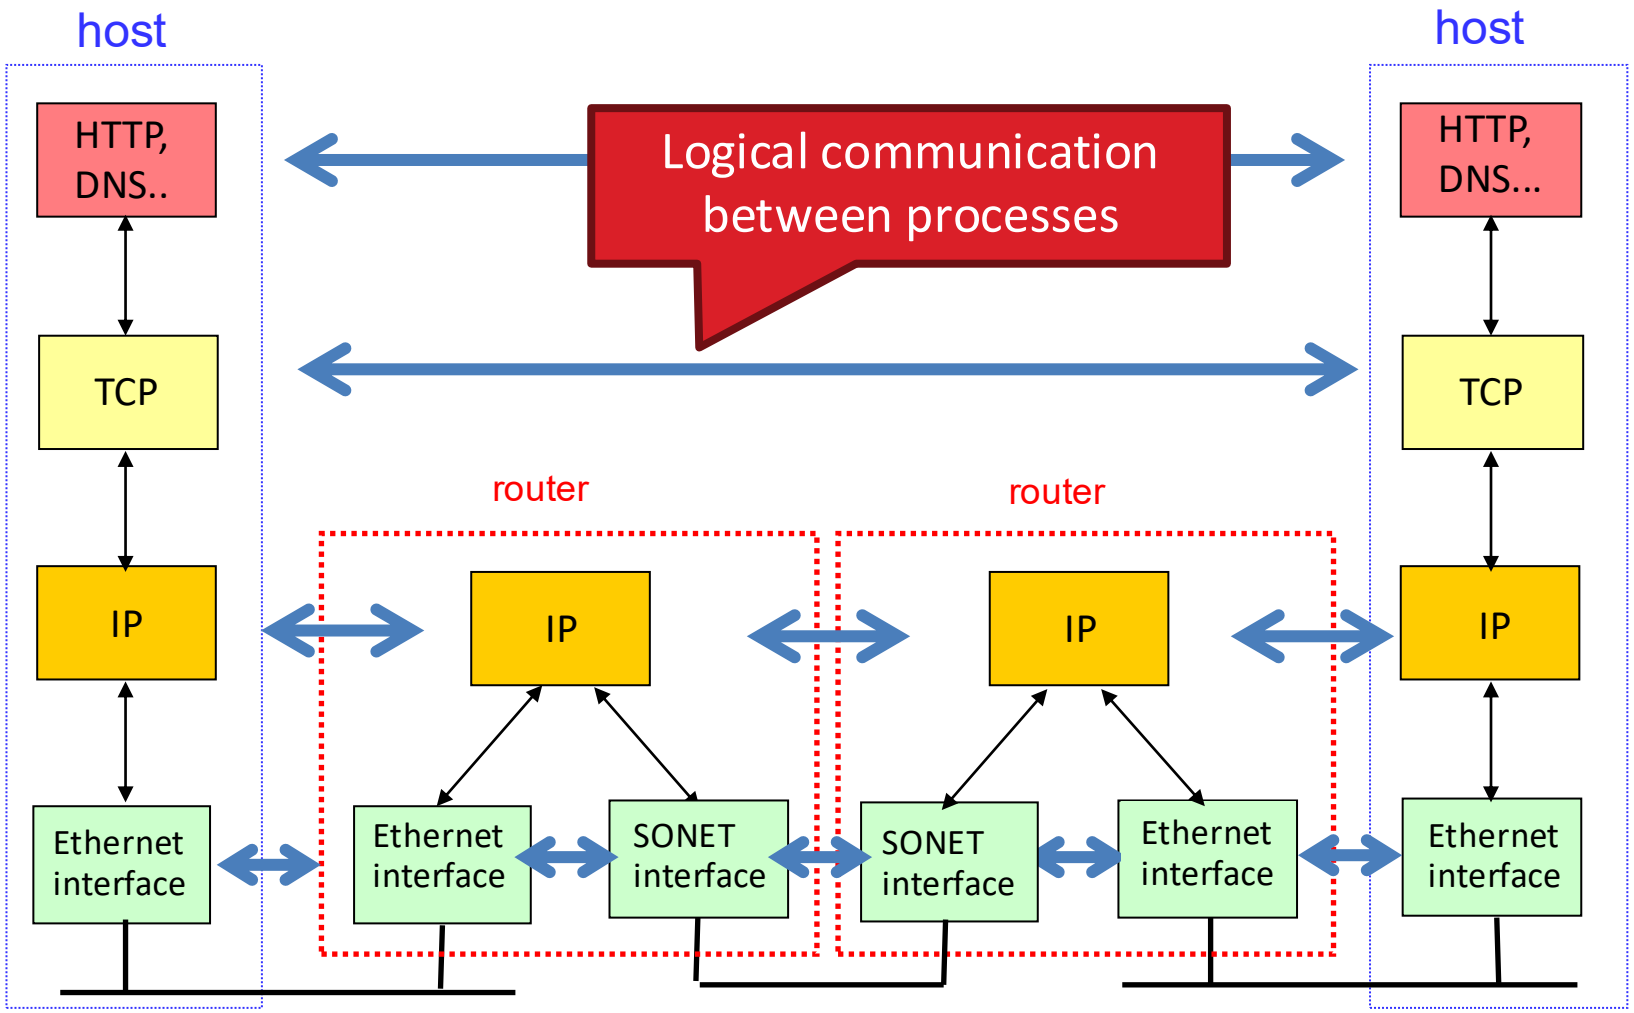

How many of these services might we provide at the transport layer? Which?

- Reliable transfers
- Error detection
- Error correction
- Bandwidth guarantees
- Latency guarantees
- Encryption
- Message ordering
- Link sharing fairness with other end hosts

A. 4 or fewer
B. 5
C. 6
D. 7
E. All 8



How many of these services might we provide at the transport layer? Which?

- Reliable transfers (T)
- Error detection (U, T)
- Error correction (T)
- Bandwidth guarantees
- Latency guarantees
- Encryption
- Message ordering (T)
- Link sharing fairness (T)

Critical question: Can it be done at the end host?

A. 4 or fewer
B. 5
C. 6
D. 7
E. All 8

TCP sounds great! UDP…meh. Why do we need it?



A. It has good performance characteristics.

B. Sometimes all we need is error detection.

C. We still need to distinguish between applications.

D. It basically just fills a gap in our layering model.

TCP sounds great! UDP…meh. Why do we need it?



A. It has good performance characteristics.

B. Sometimes all we need is error detection.

C. We still need to distinguish between applications.

D. It basically just fills a gap in our layering model.

Adding Features

- Nothing comes for free
- Data given by application
- Apply header
  - Keeps transport state
  - Attached by sender
  - Decoded by receiver





Moving down a layer!

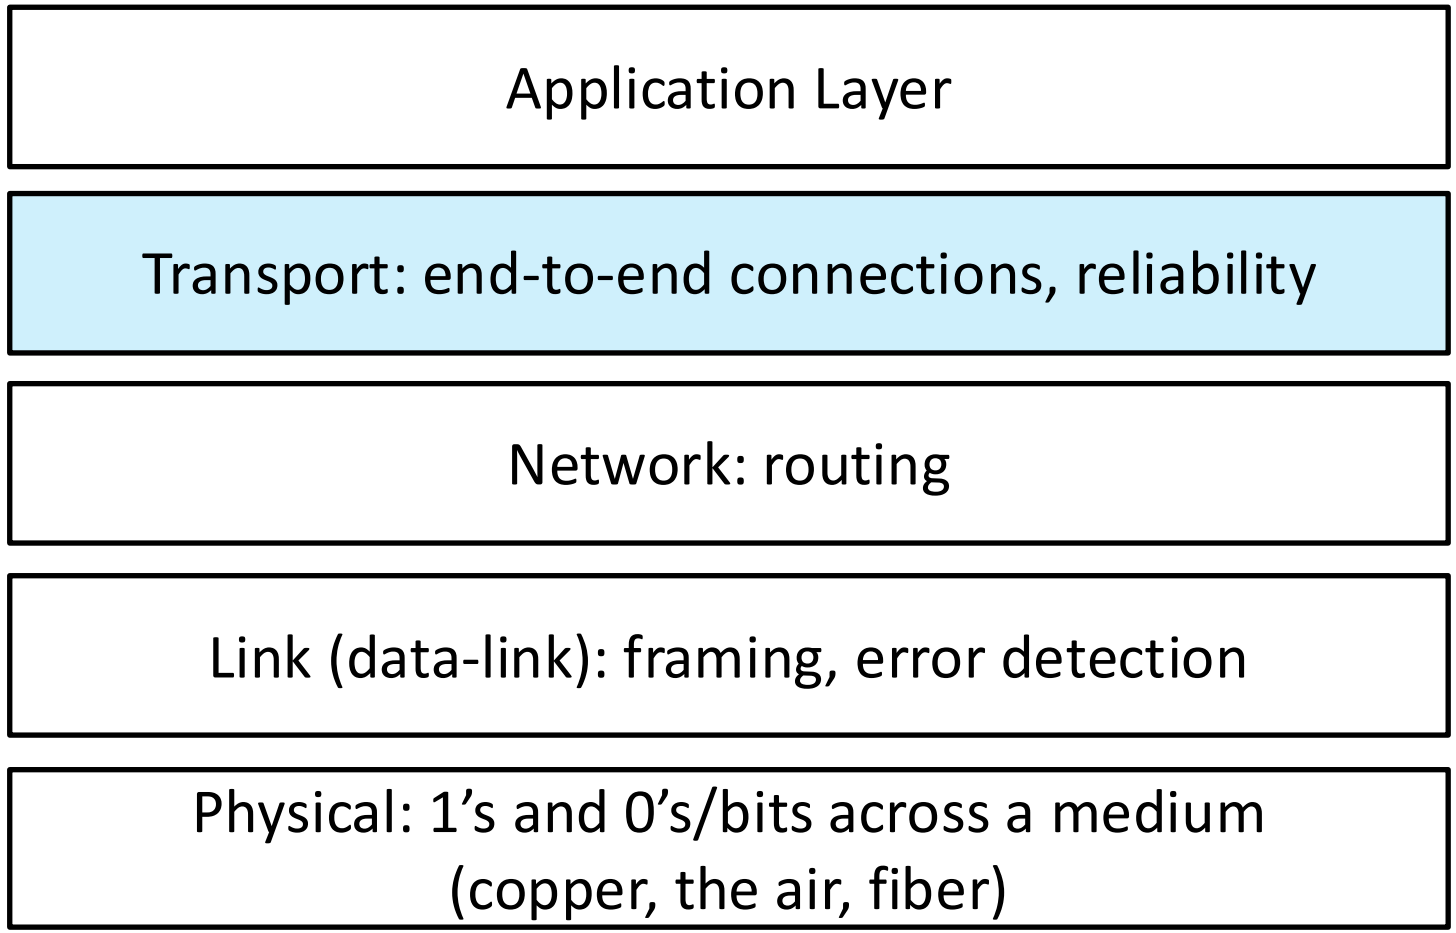

Network mnemonics

"Big Freaking Deal, Sherlock!"

- Data pieces:
  - Transport: Segments
  - Network: Datagrams (or packets)
  - Link: Frames
  - Physical: Bits

Two Main Transport Layer Protocols

- User Datagram Protocol (UDP)
  - Unreliable, unordered delivery
- Transmission Control Protocol (TCP)
  - Reliable in-order delivery

TCP: Transport Control Protocol

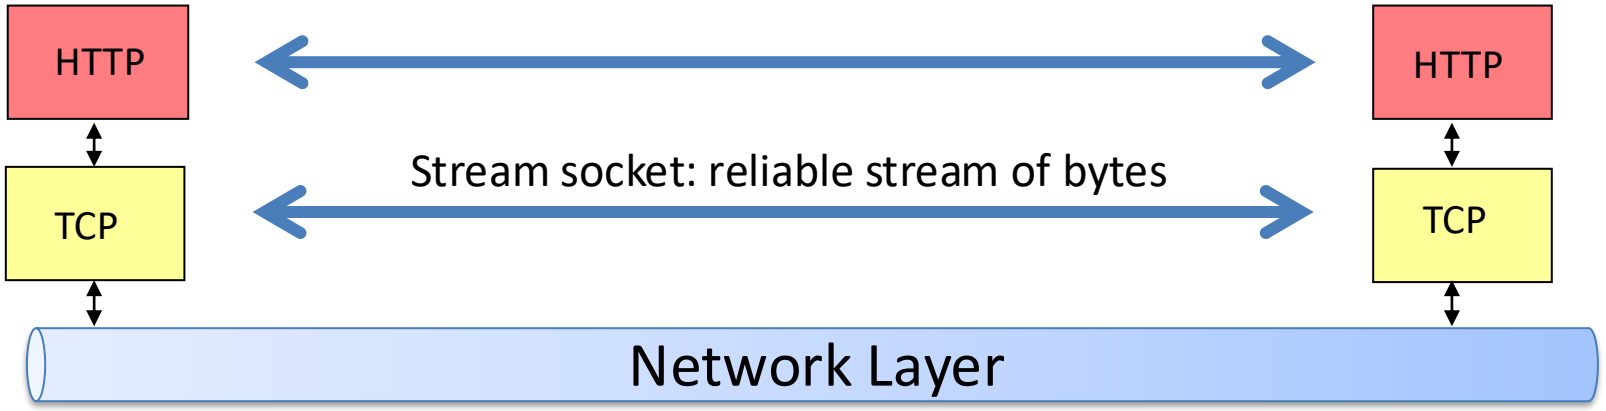

GET http://www.google.com HTTP/1.1
Host: www.google.com
...



3 google.c | 2 p://www. | 1 GET htt



application layer packet boundaries are not preserved

- multiple send() -> one recv()
- 1 send() -> multiple recv()

TCP: Stream abstraction

send() and recv() need not have a 1-1 correspondence.

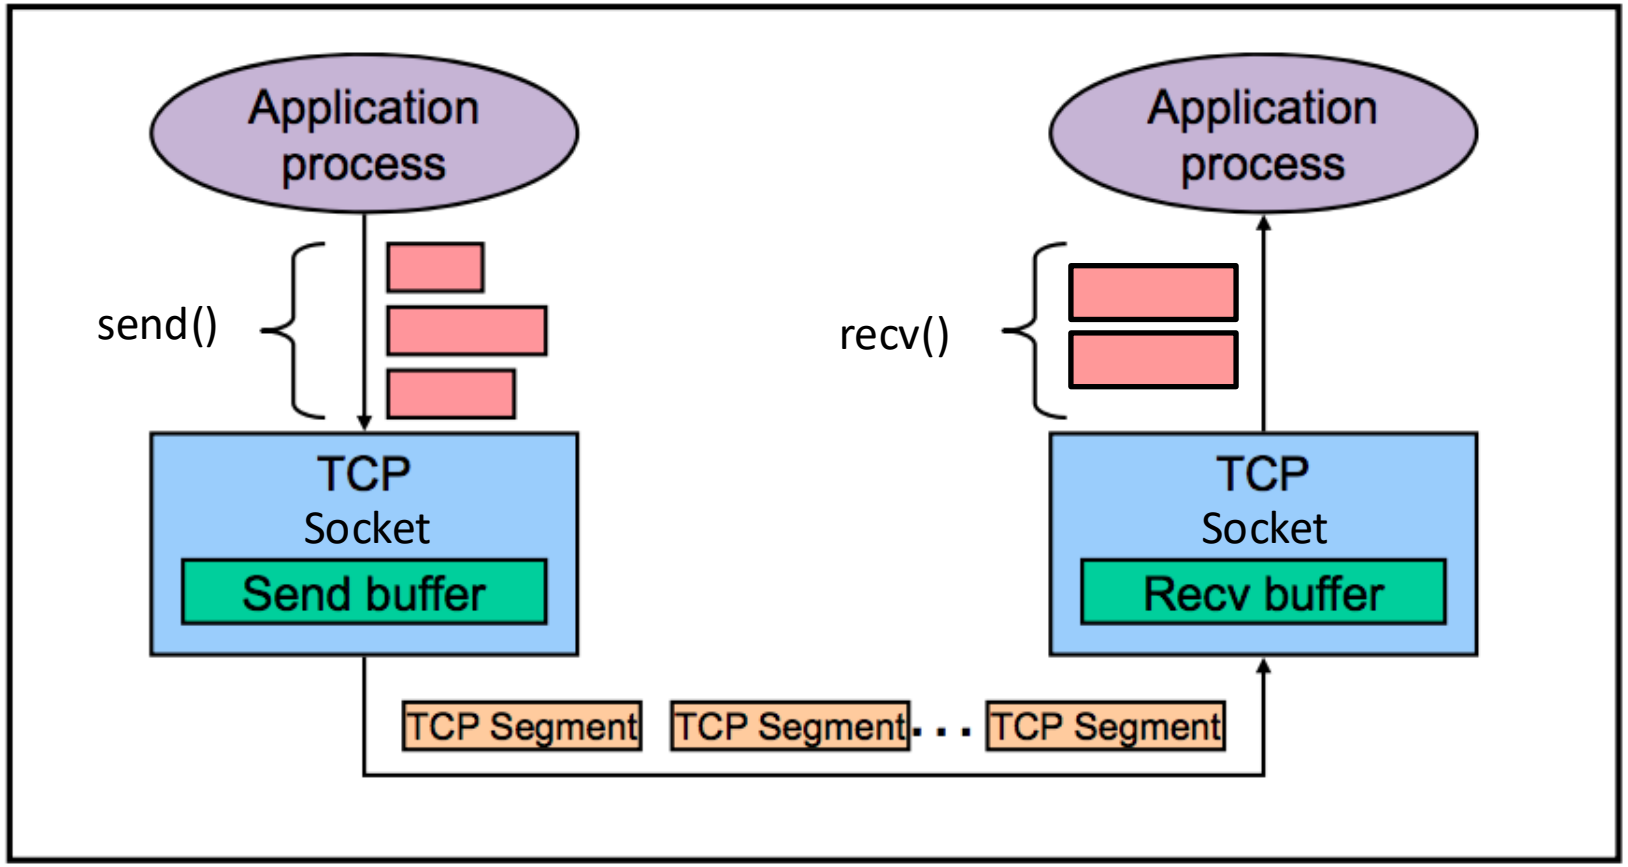

UDP: User Datagram Protocol

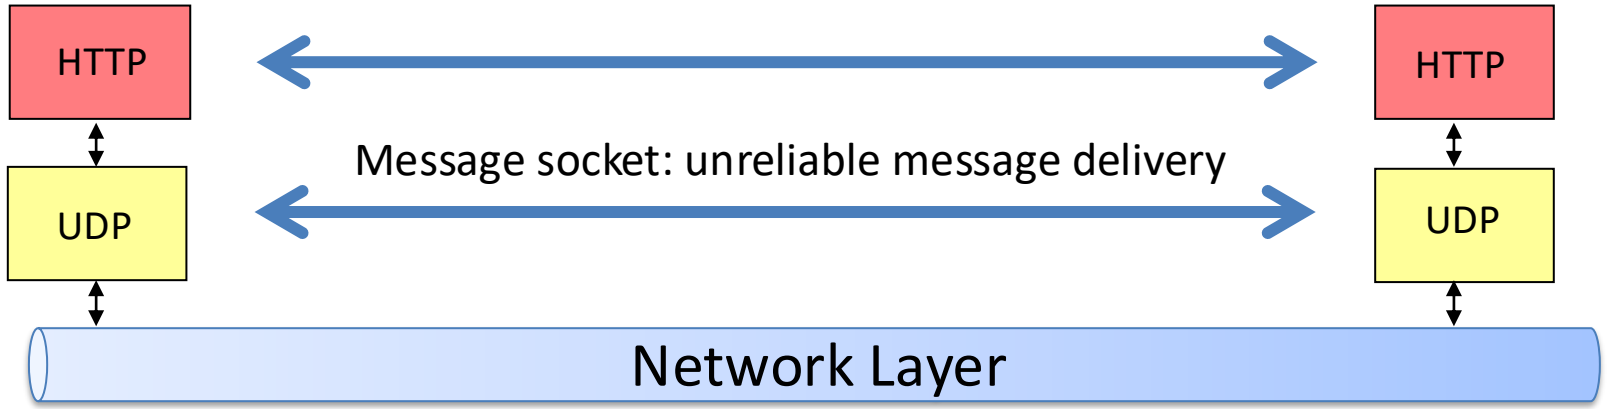

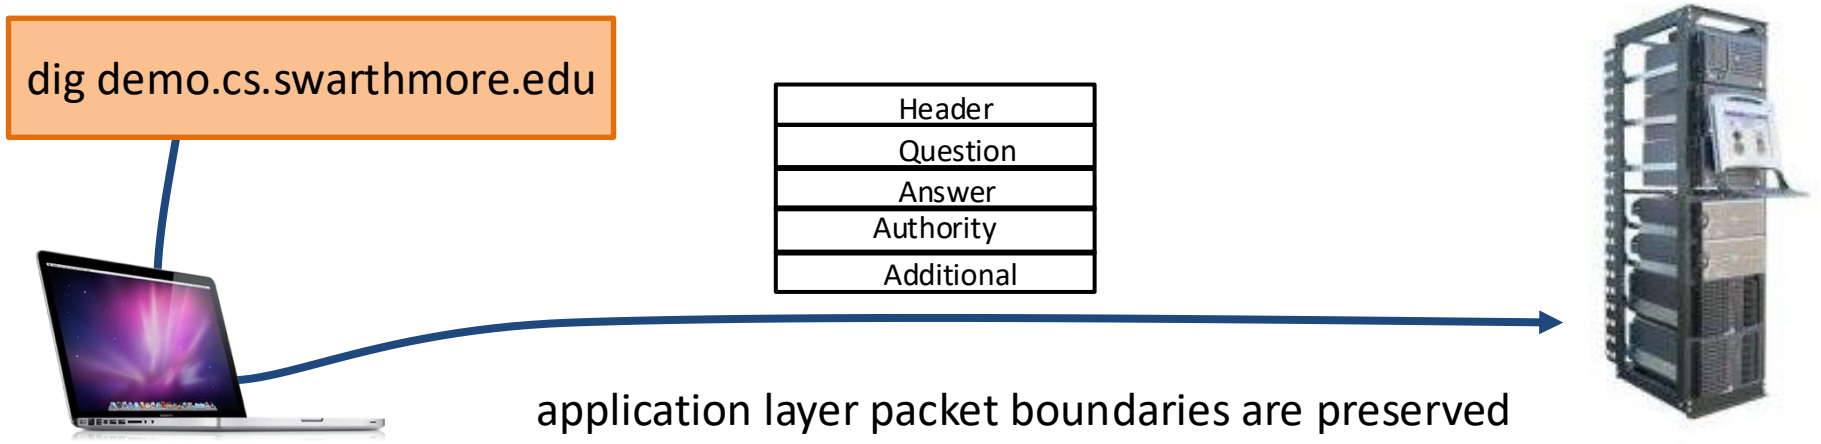

application layer packet boundaries are preserved

- 1 send() -> 1 recv()

Sockets

- Application processes communicate using "sockets"/mailboxes
  - Abstraction: sends/receives data to/from its socket

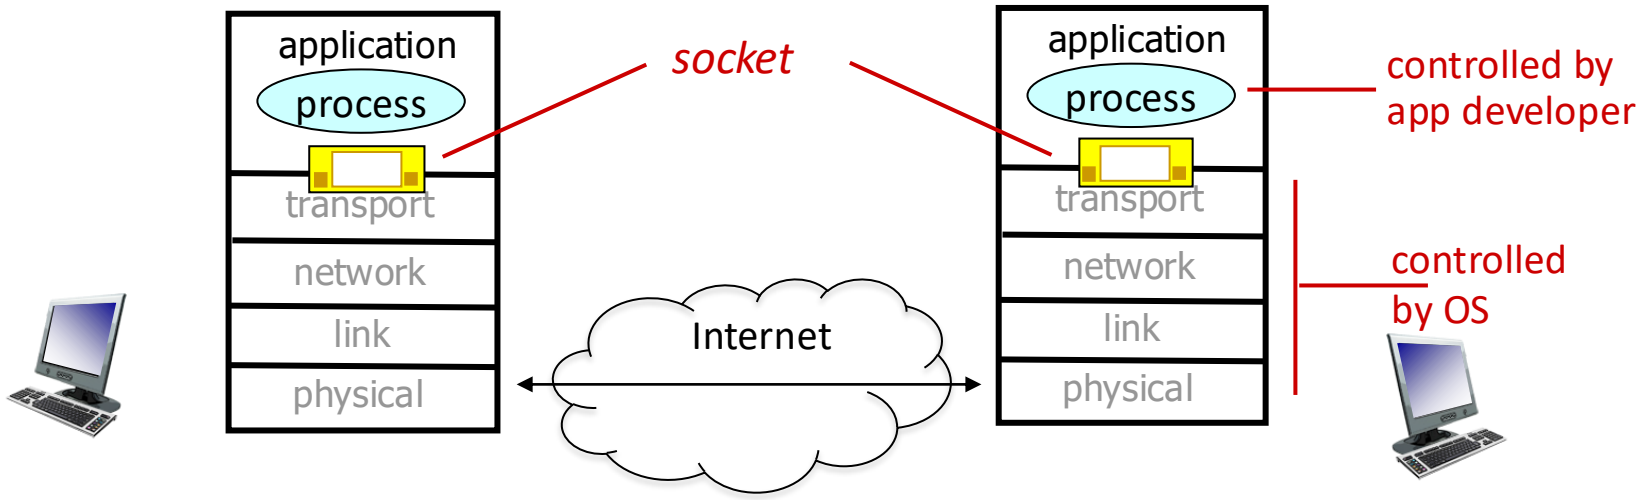

Recall TCP Sockets

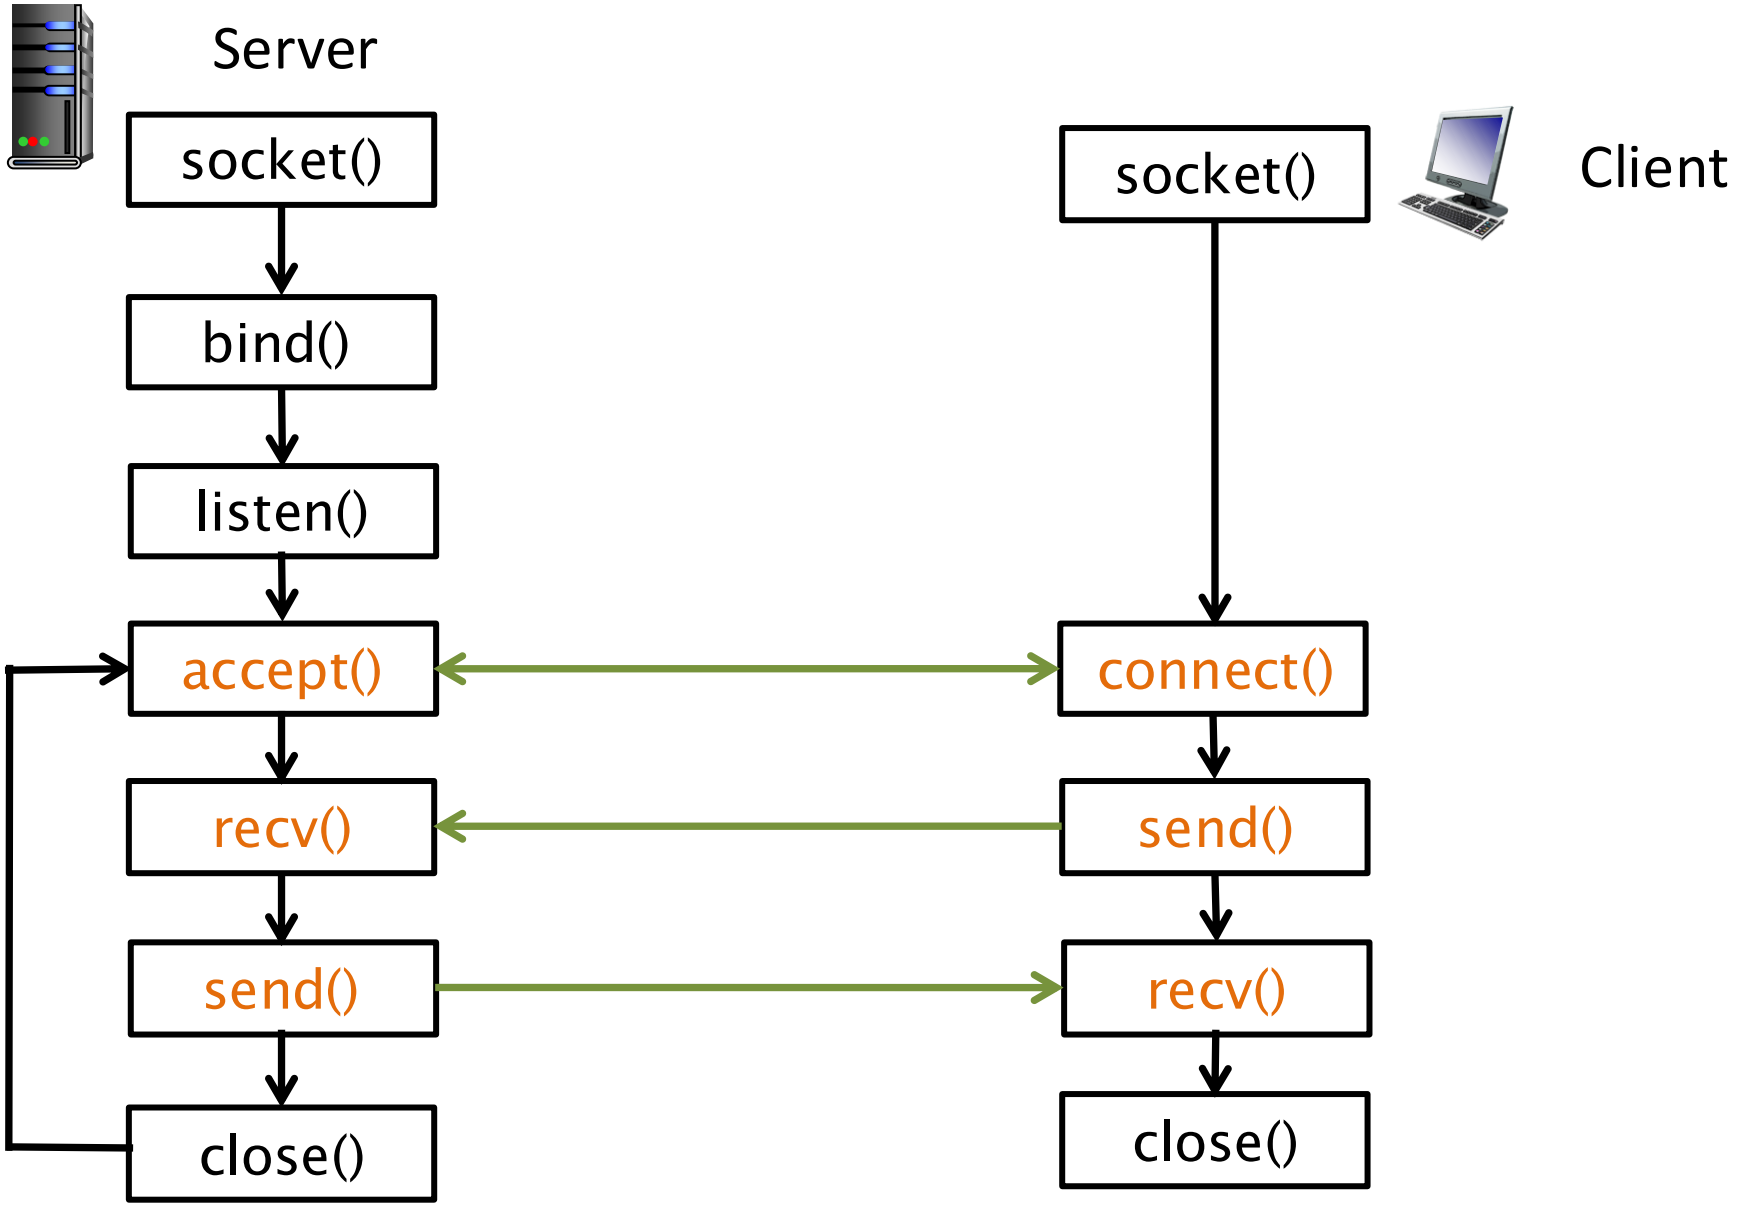

UDP Sockets

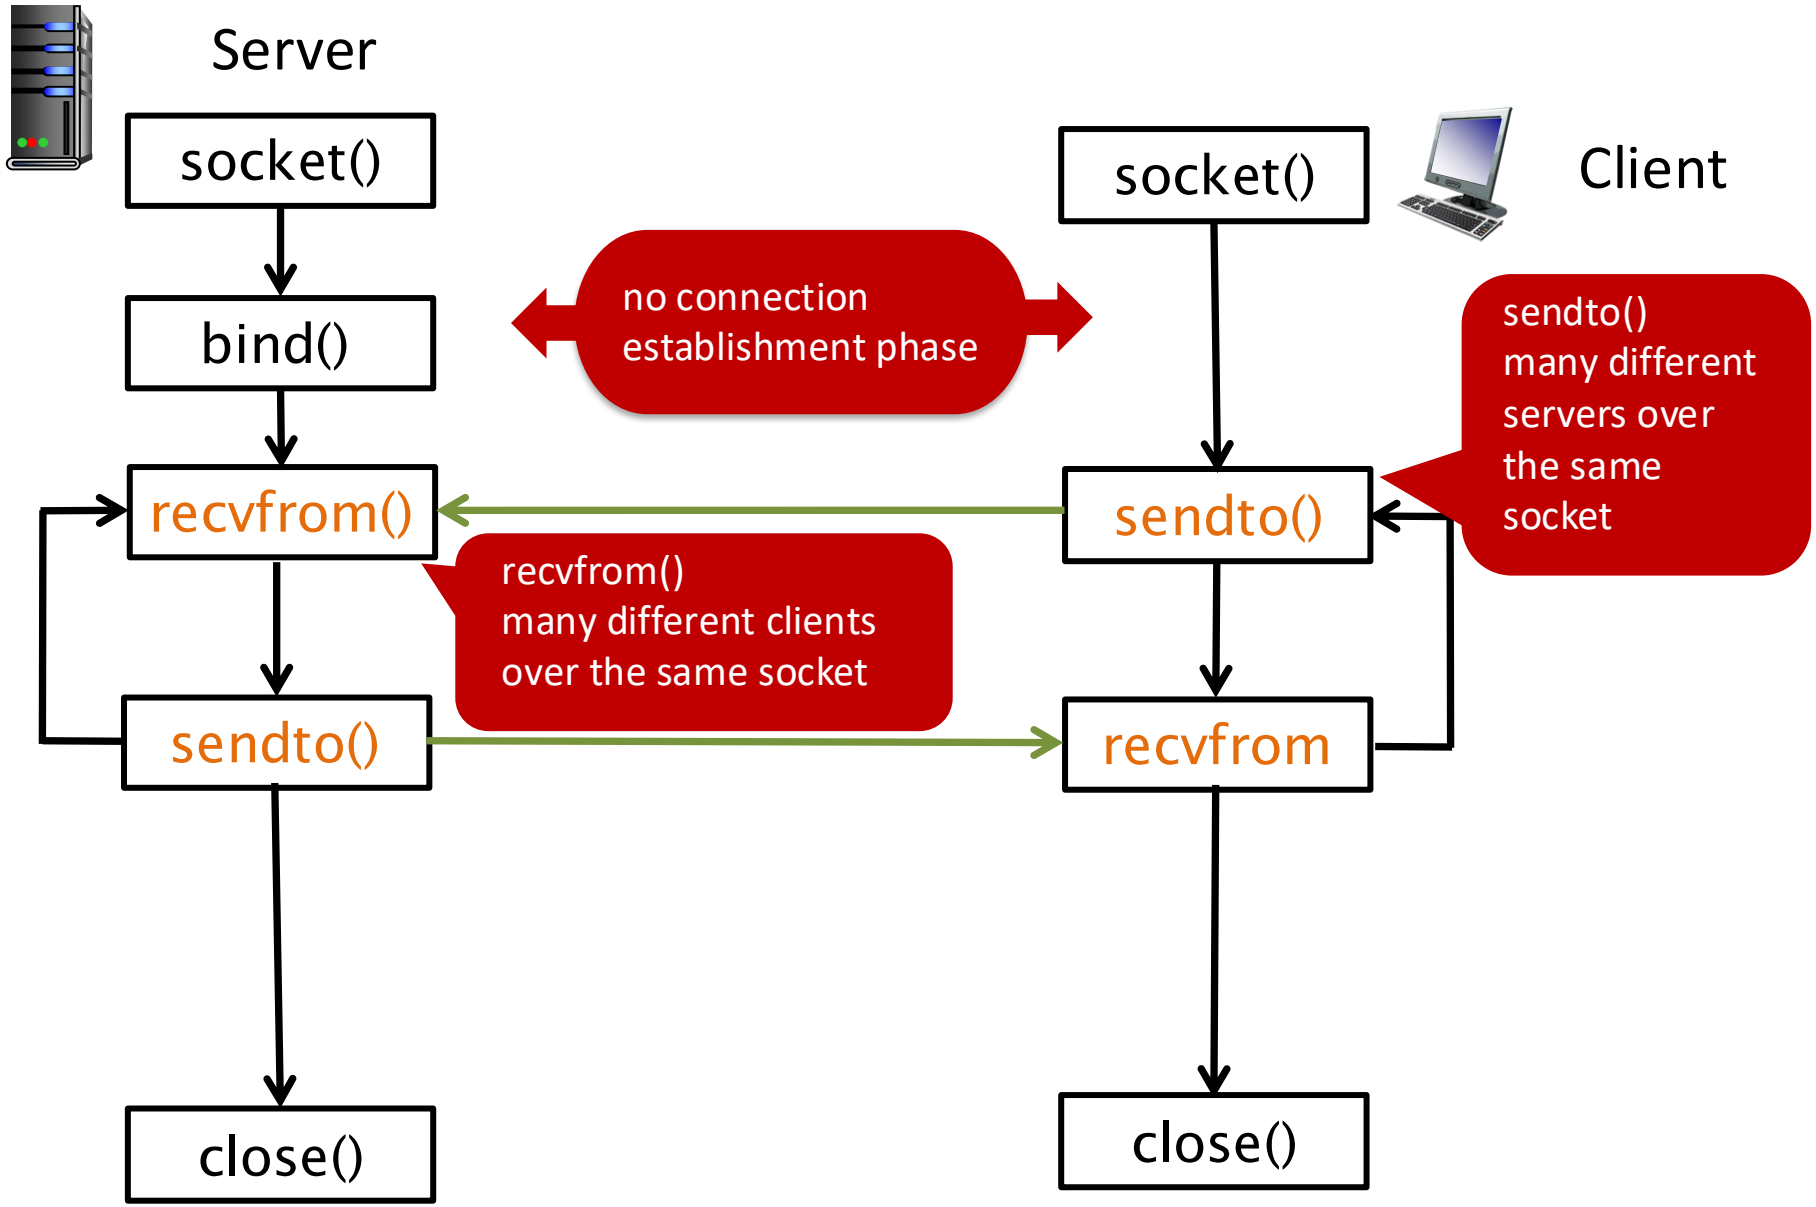
Server
socket()
bind()
recvfrom()
sendto()
close()
no connection establishment phase
recvfrom() many different clients over the same socket
socket()
Client
sendto() many different servers over the same socket
sendto()
recvfrom
close()

Multiplexing/demultiplexing: Transport Layer

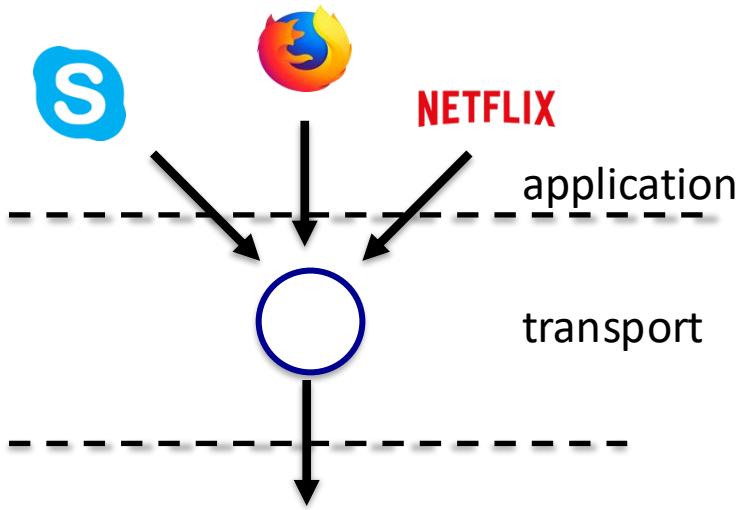

multiplexing

assign port # to distinguish between applications on the same end hosts

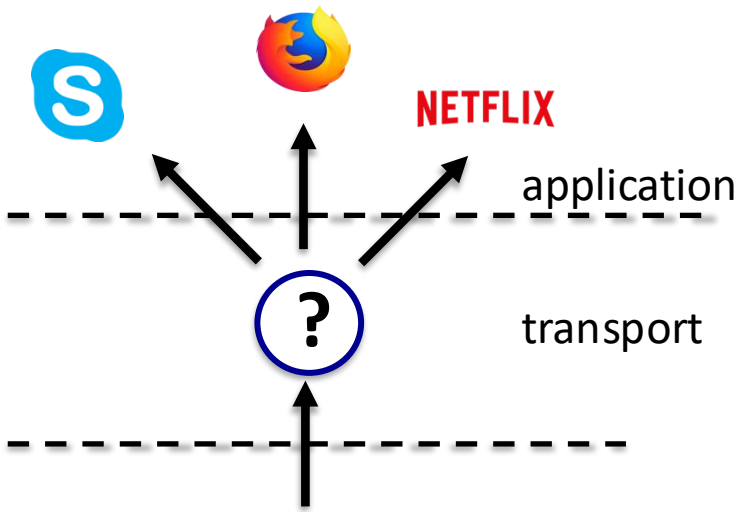

de-multiplexing

use port # to direct packets to the correct application layer processes

Multiplexing/demultiplexing

multiplexing at sender:

handle data from multiple sockets, add transport header (later used for demultiplexing)

demultiplexing at receiver:

use header info to deliver received segments to correct socket

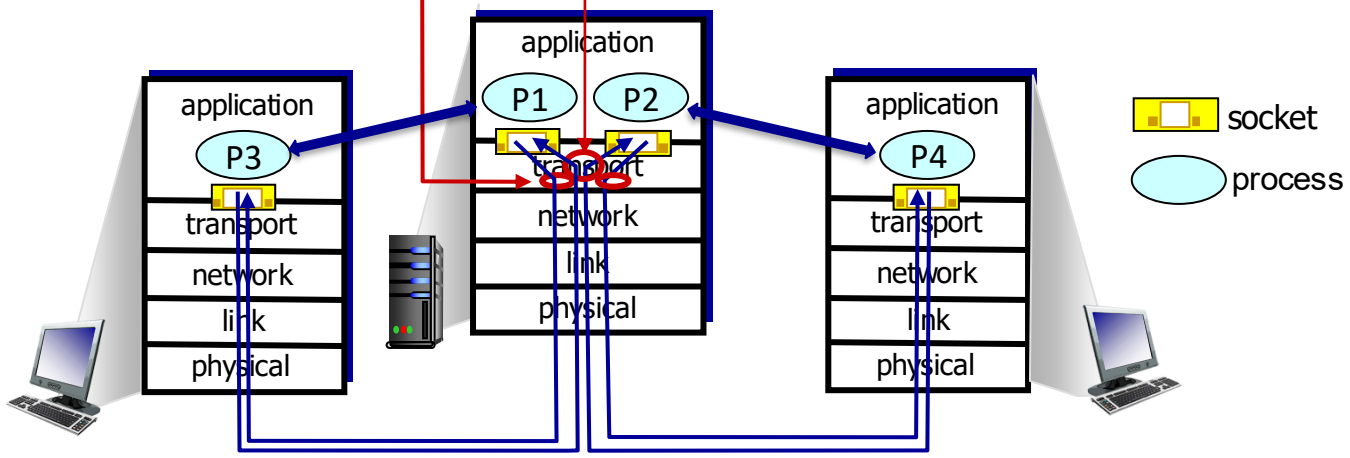

Recall: Connection-oriented: example

- TCP socket identified by 4-tuple:
  - source IP address
  - source port number
  - dest IP address
  - dest port number
- Receiver uses all four values to direct segment to appropriate socket

Recall: Connection-oriented: HTTP example

A TCP socket is uniquely identified by (source IP, source port, dest IP, dest port)

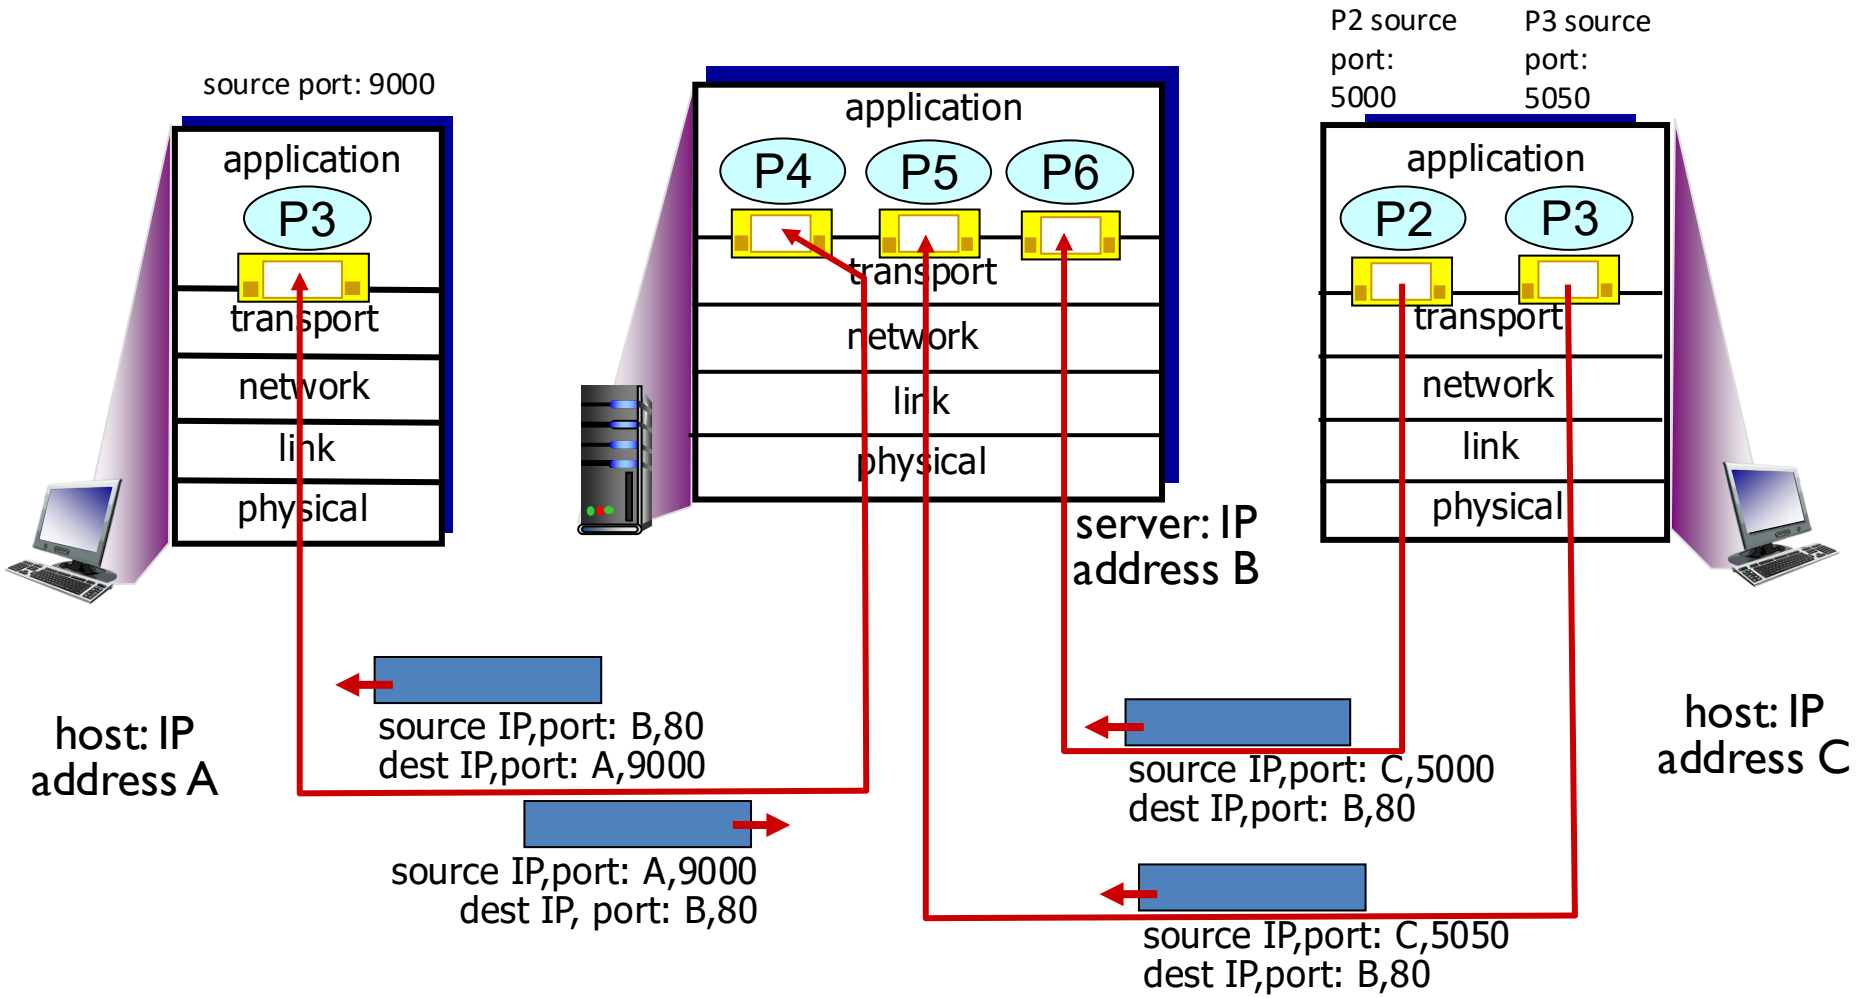

Connectionless: example

- UDP socket identified by 2-tuple:
  - dest IP address
  - dest port number
- when receiving host receives UDP segment:
  - checks destination port # in segment
  - directs UDP segment to socket with that port #

UDP datagrams with *same dest. port #,* but different source (IP/ port #) will be directed to *same socket* at receiving host

Connectionless demultiplexing: an example

A UDP socket is uniquely identified by (dest IP, dest port)

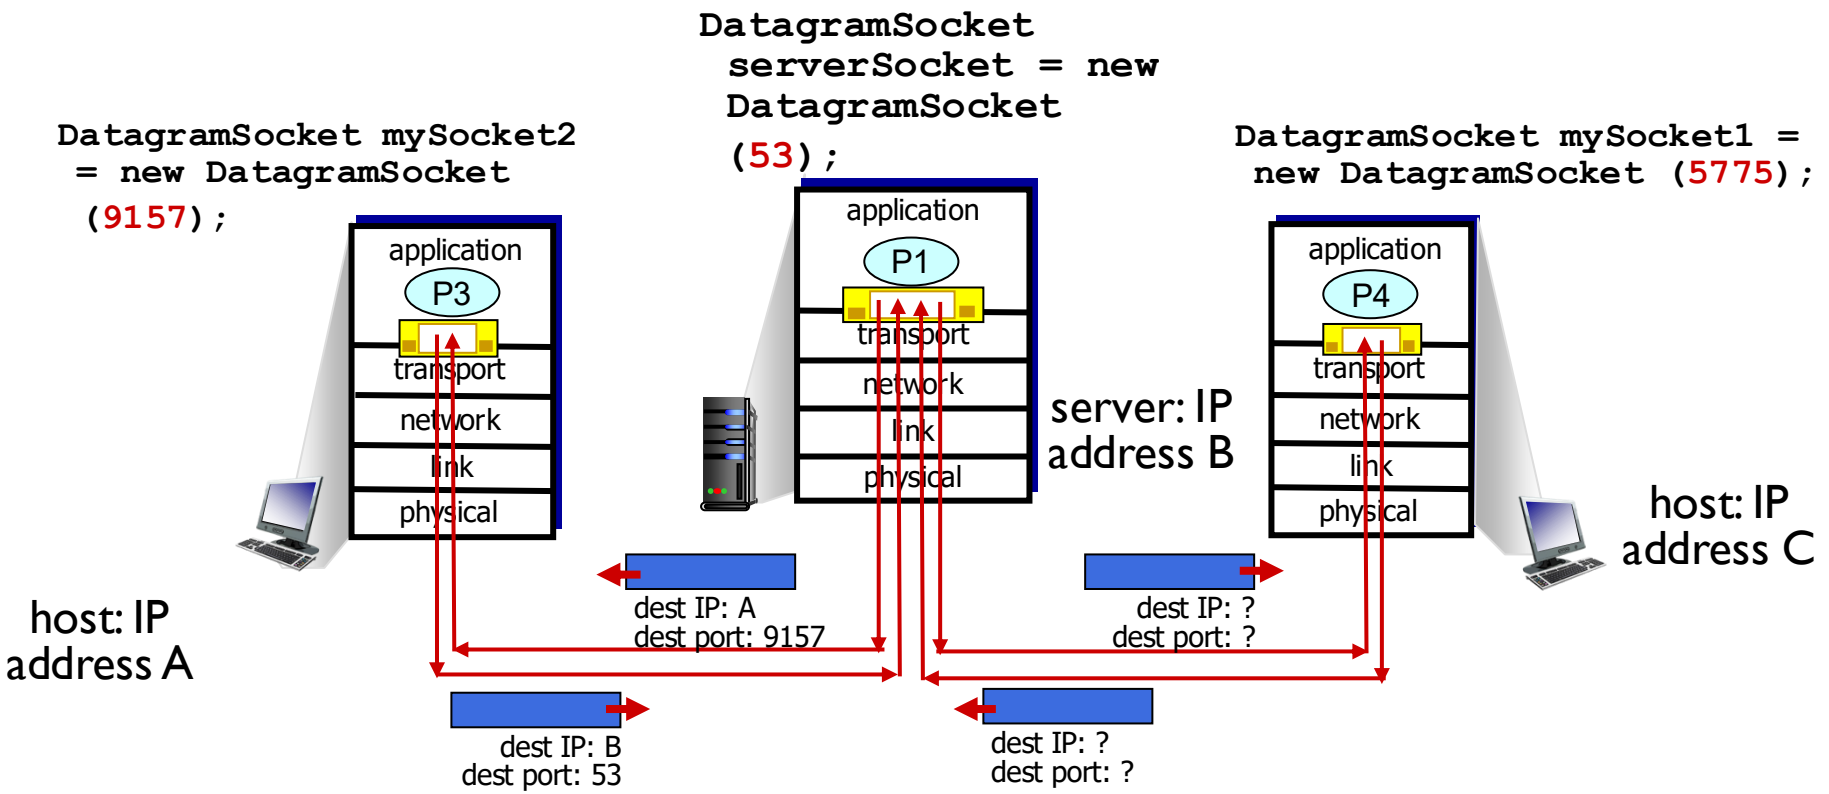

UDP – User Datagram Protocol

- Unreliable, unordered service
- Adds:
  - multiplexing,
  - checksum (error detection)

UDP: User Datagram Protocol [RFC 768]

"No frills," "Bare bones" Internet transport protocol

- RFC 768 (1980)
- Length of the document? https://www.rfc-editor.org/rfc/rfc768.html

UDP: User Datagram Protocol [RFC 768]

“Best effort” service,

¯_(ツ)_/¯

UDP segments may be:

- Lost
- Delivered out of order (same as underlying network layer)

Connectionless:

- No initial state transferred between parties (no handshake)
- Each UDP segment is handled independently

How many of the following steps does UDP implement? (which ones?)

A. exchange an initiate handshake (connection setup)
B. break up packet into segments at the source and number them
C. place segments in order at the destination
D. error-checking with checksum

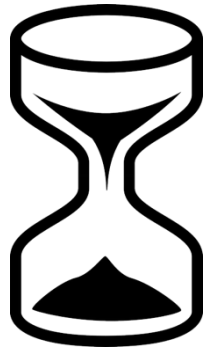

How many of the following steps does UDP implement? (which ones?)

A. exchange an initiate handshake (connection setup)
B. break up packet into segments at the source and number them
C. place segments in order at the destination
D. error-checking with checksum

Connectionless:

- No initial state transferred between parties (no handshake)
- Each UDP segment is handled independently

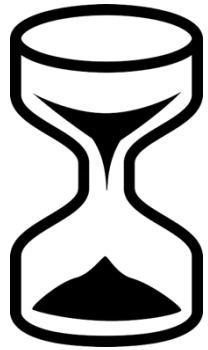

UDP Segment

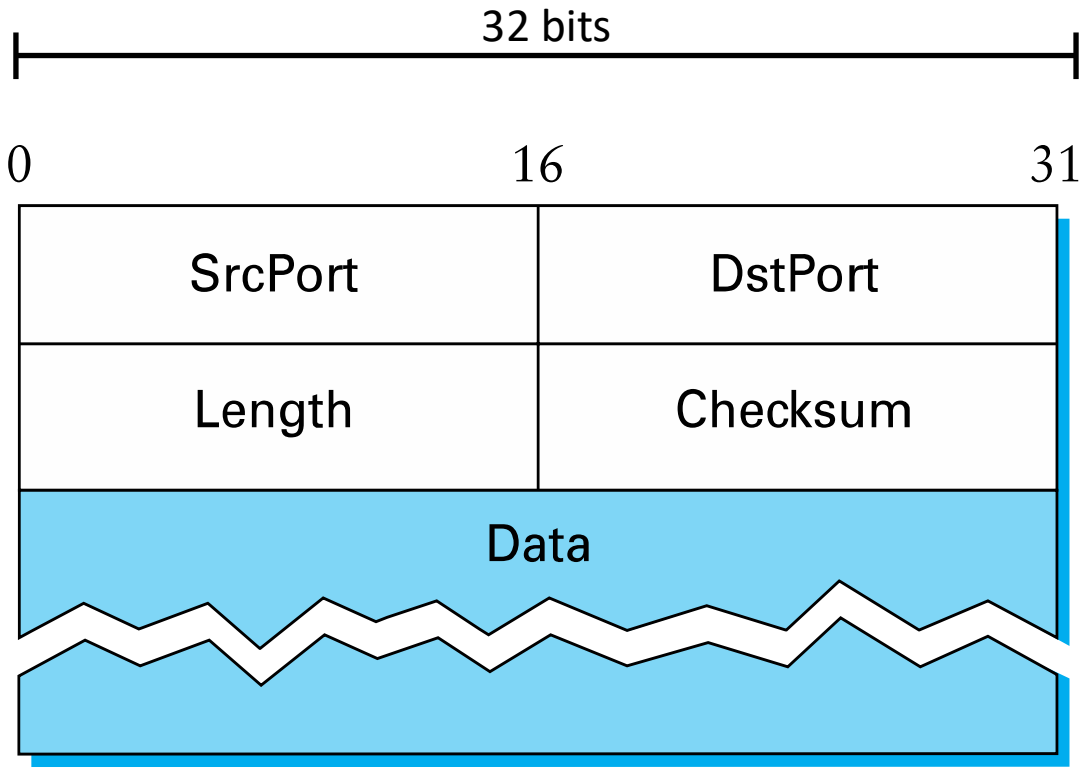

TCP Segment!

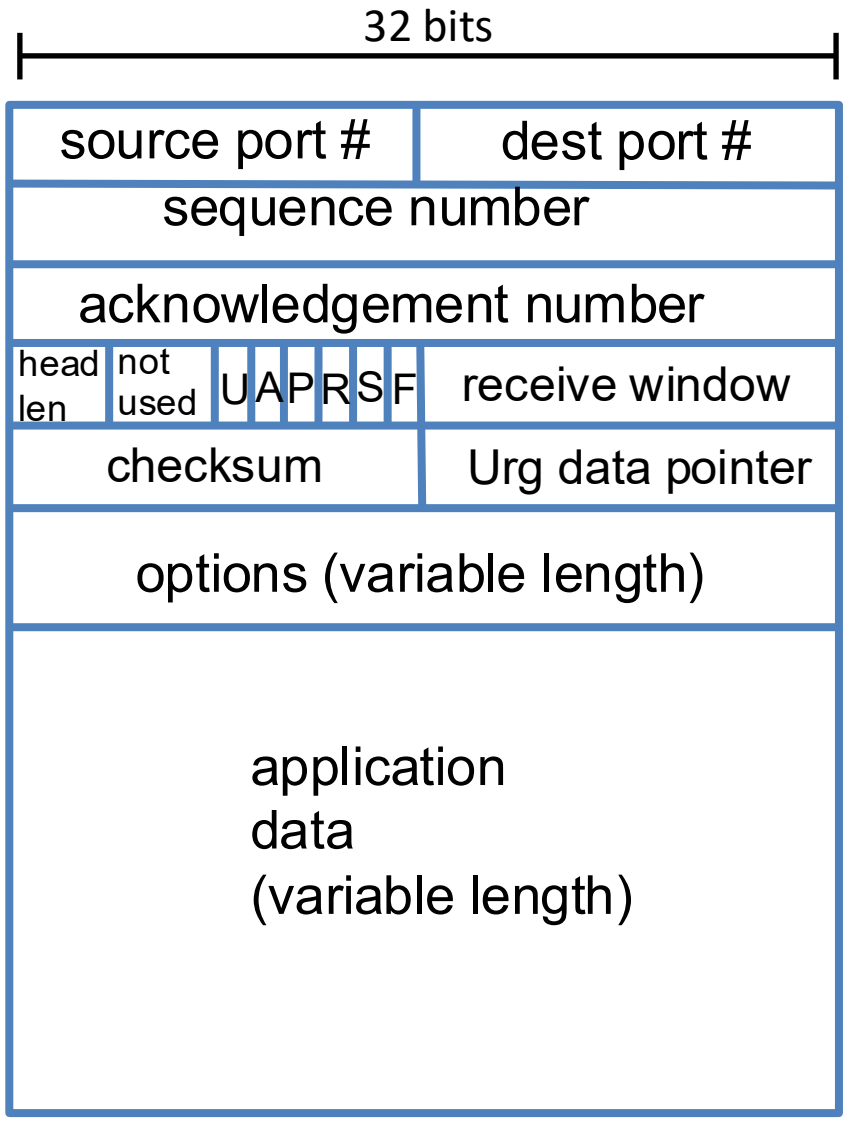
32 bits
source port #
dest port #
sequence number
acknowledgement number
head len
not used
U
A
P
R
S
F
receive window
checksum
Urg data pointer
options (variable length)
application
data
(variable length)

UDP Segment

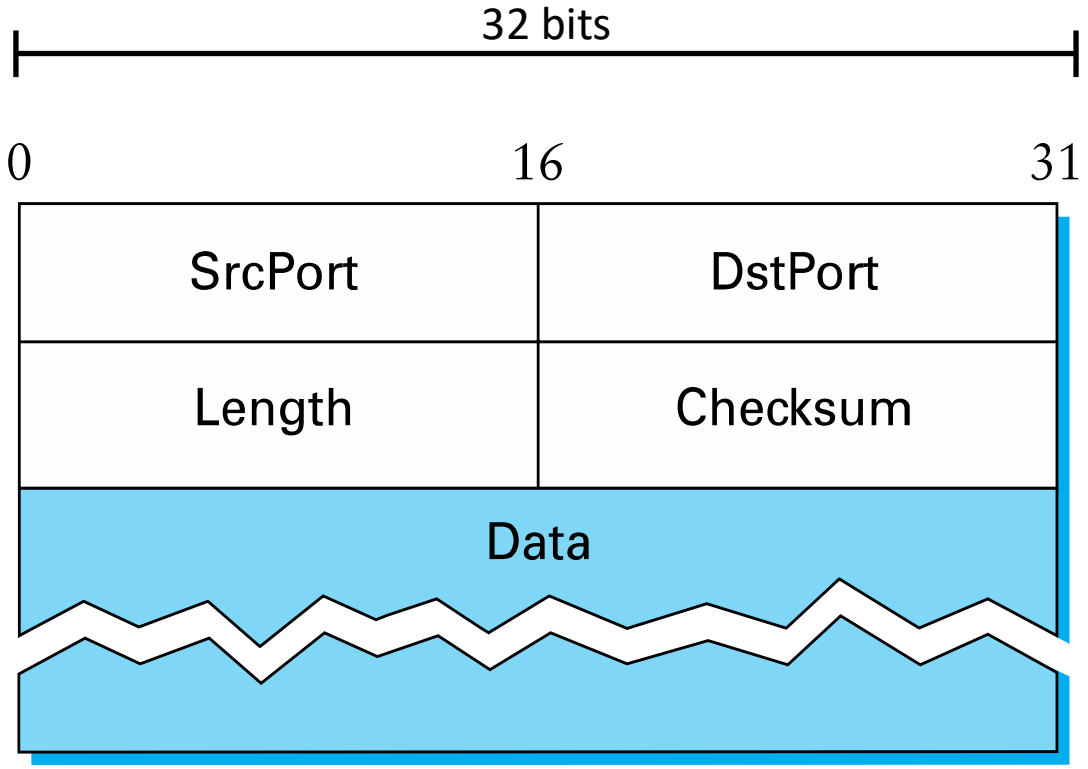

UDP Checksum

- Goal: Detect transmission errors (e.g. flipped bits)
  - Router memory errors
  - Driver bugs
  - Electromagnetic interference

UDP Checksum

Goal: detect errors (*i.e.*, flipped bits) in transmitted segment

	1st number	2nd number	sum
Transmitted:	5	6	11
Received:	4	6	11

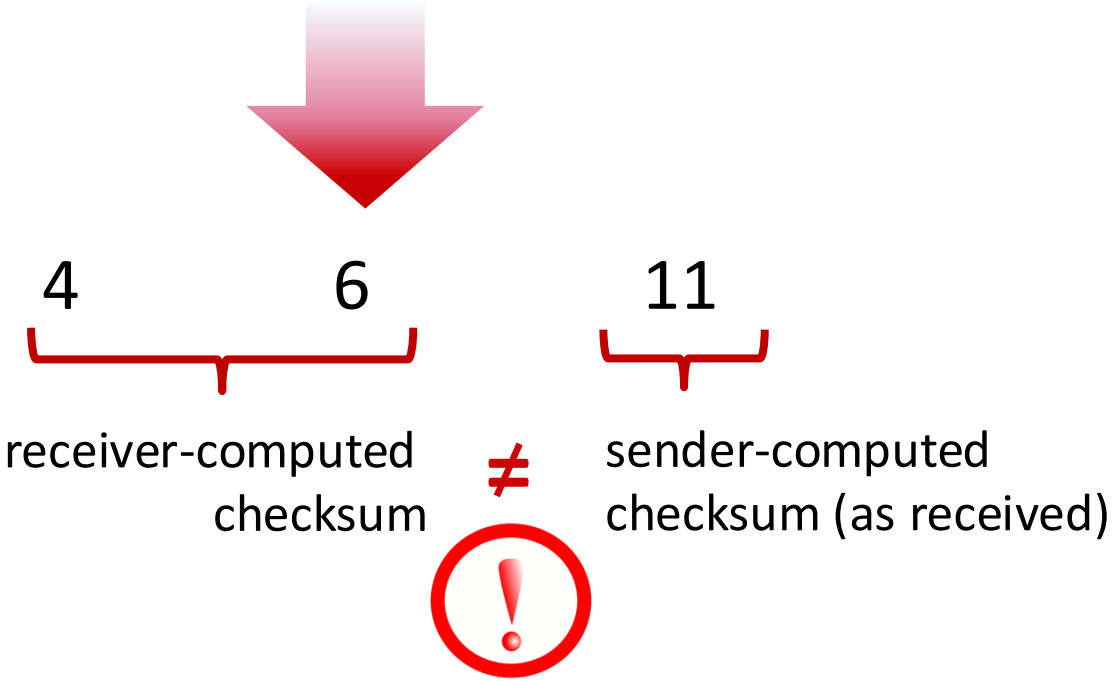

UDP Checksum

RFC: “Checksum is the 16-bit one's complement of the one's complement sum of a pseudo header of information from the IP header, the UDP header, and the data, padded with zero octets at the end (if necessary) to make a multiple of two octets.”

(? _ ?)

UDP Checksum at the Sender

- Treat the entire segment as 16-bit integer values
- Add them all together (sum)
- Put the 1's complement in the checksum header field

One's Compliment

- In bitwise compliment, all of the bits in a binary number are flipped.

- So 1111000011110000 -> 0000111100001111

Checksum example

example: add two 16-bit integers

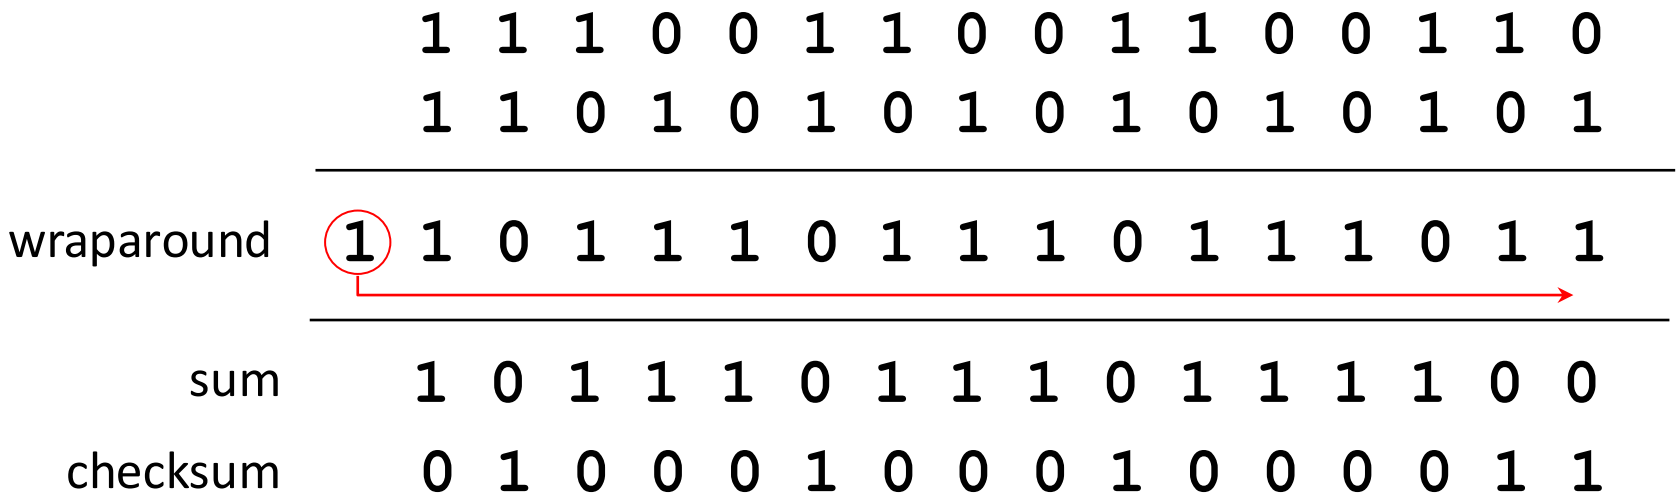

Note: when adding numbers, a carryout from the most significant bit needs to be added to the result

Receiver

- Add all the received data together as 16-bit integers
- Add that to the checksum
- If result is not 1111 1111 1111 1111, there are errors!
- If there are errors chuck the packet.

¯_(ツ)_/¯

If our checksum addition yields all ones, are we guaranteed to be error-free?

A. Yes

B. No

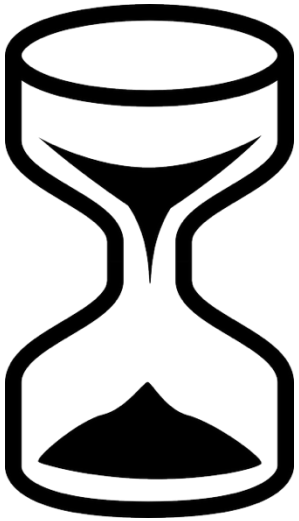

Checksum example : weak protection!

example: add two 16-bit integers

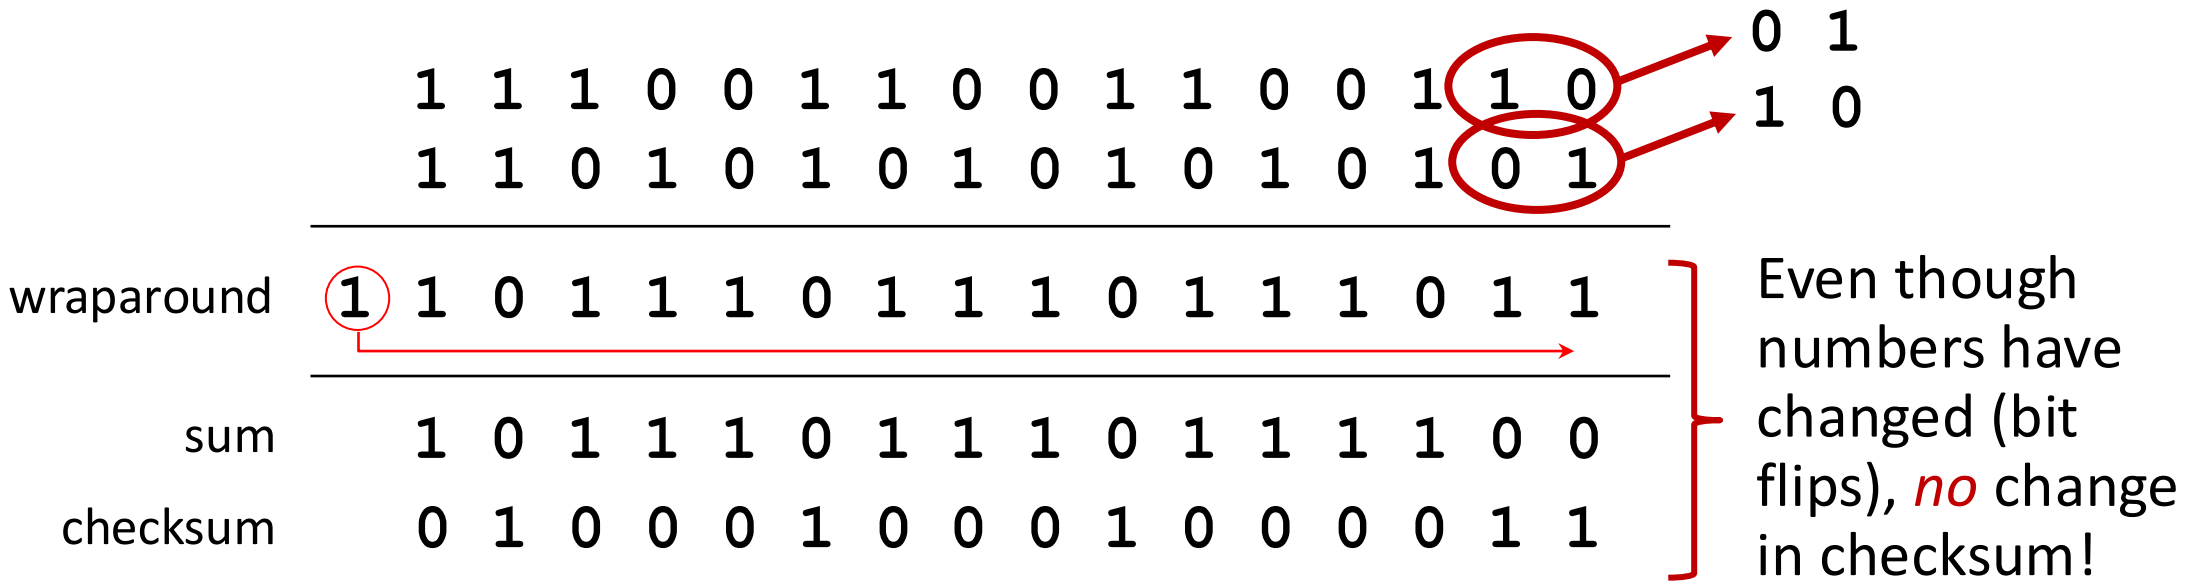

UDP Applications

- Latency sensitive
  - Quick request/response (DNS)
  - Network management (SNMP, DHCP)
  - Voice/video chat

- Communicating with *lots* of others

Recall: TCP send() blocking

With TCP, send() blocks if buffer full.

UDP sendto() blocking

With TCP, send() blocks if buffer full.

- Does UDP need to block? Should it?

A. Yes, if buffers are full, it should.
B. It doesn't need to, but it might be useful.
C. No, it does not need to and shouldn't do so.

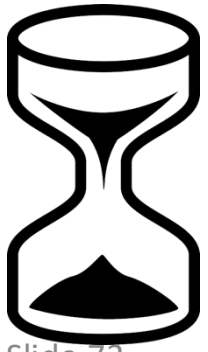

UDP sendto() blocking

With TCP, send() blocks if buffer full.

- Does UDP need to block? Should it?

A. Yes, if buffers are full, it should.
B. It doesn't need to, but it might be useful.
C. No, it does not need to and shouldn't do so.

Summary

Transport Layer:

- Provides a logical communication between processes/ applications
- packets are called segments at the transport layer
- Transport layer protocol: responsible for adding port numbers (mux/demux segments)

Summary

UDP:

- No “frills” protocol, No state maintained about the packet
- Checksum (1’s complement) over IP + UDP + payload.
  - can only correct for 1 bit errors.
- adds port numbers over unreliable network (best effort)
- applications:
  - latency sensitive applications: real-time audio, video
  - communicating with a lot of end-hosts (like DNS)
- UDP Sockets:
  - do not need to be implemented as blocking system calls for correctness since the only guarantee UDP makes is best-effort delivery.
  - however send/recv can be implemented as blocking system calls depending on the application